


Mechanical Instructions 4WD Audi R18





Wheel assembly: front right

XX = Item number

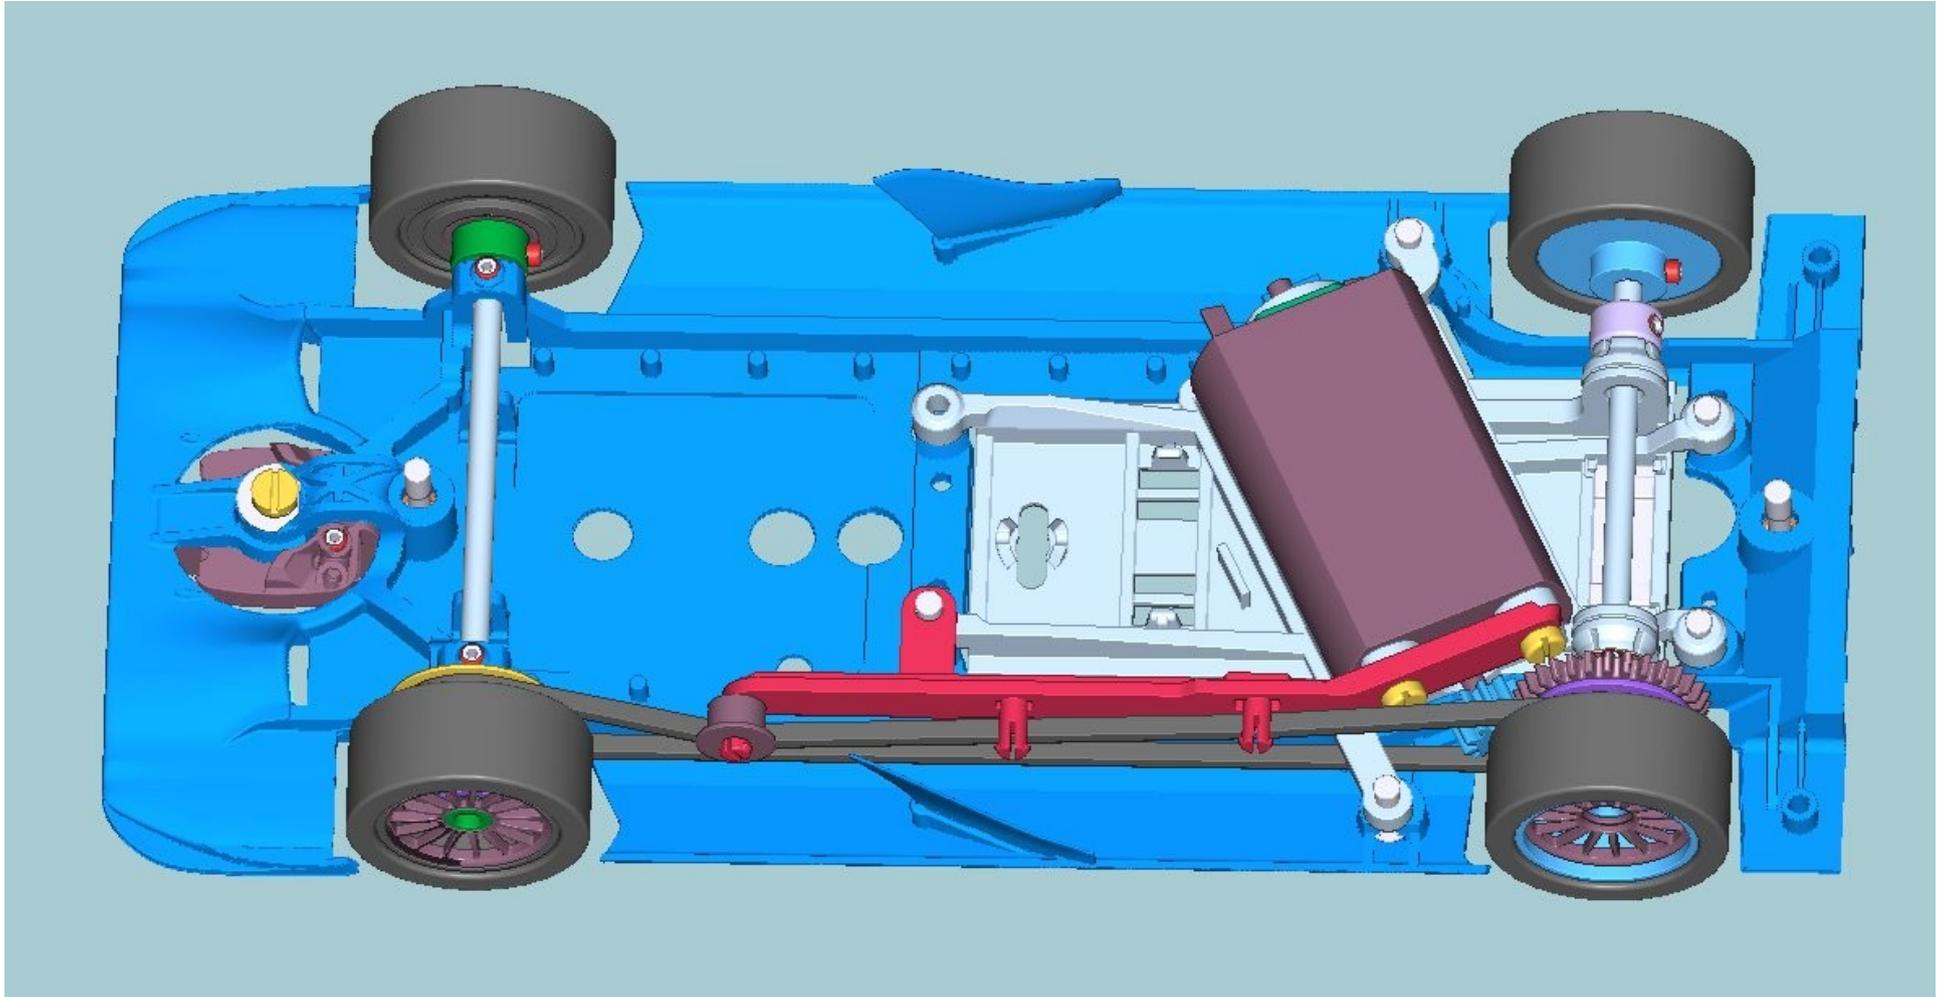


FRONT RIGHT WHEEL

1) Insert bearing from the inside of the wheel

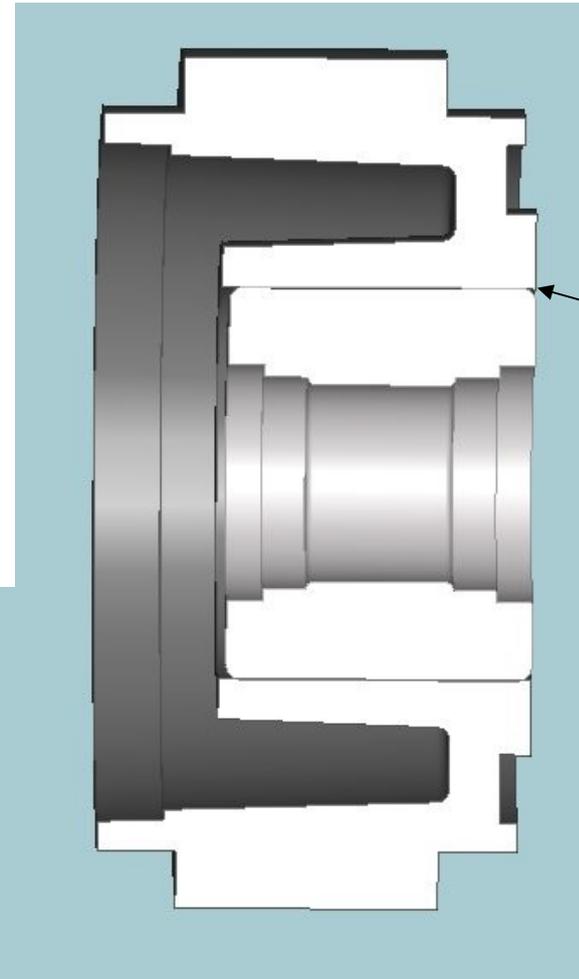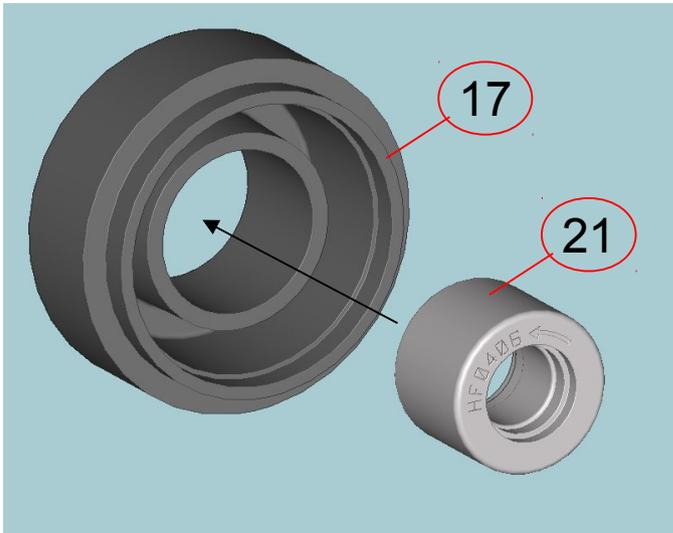


Bearing must be aligned in the plastic wheel so that its inside surface is aligned with the inside surface of the plastic wheel.


Warning! the bearing in right front wheel must be assembled with the 'HF0406' writing facing OUTSIDE of the car!

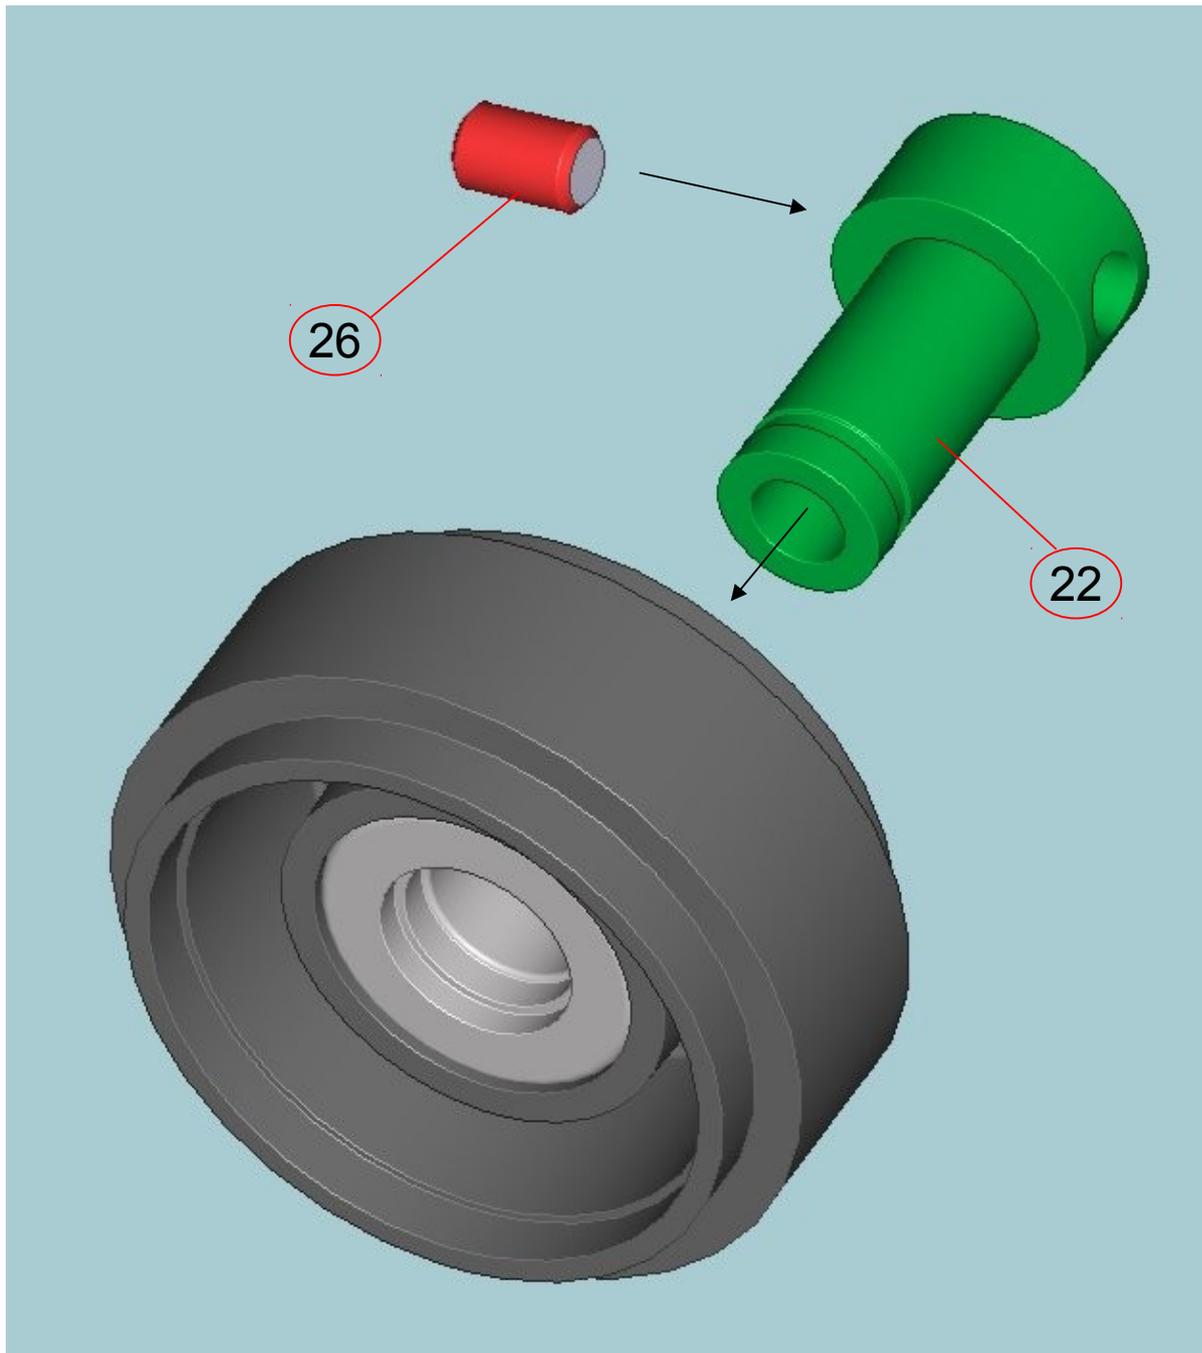

2 - Insert aluminium hub in the bearing, and insert the mini screw M2x3 in one of the two hub holes

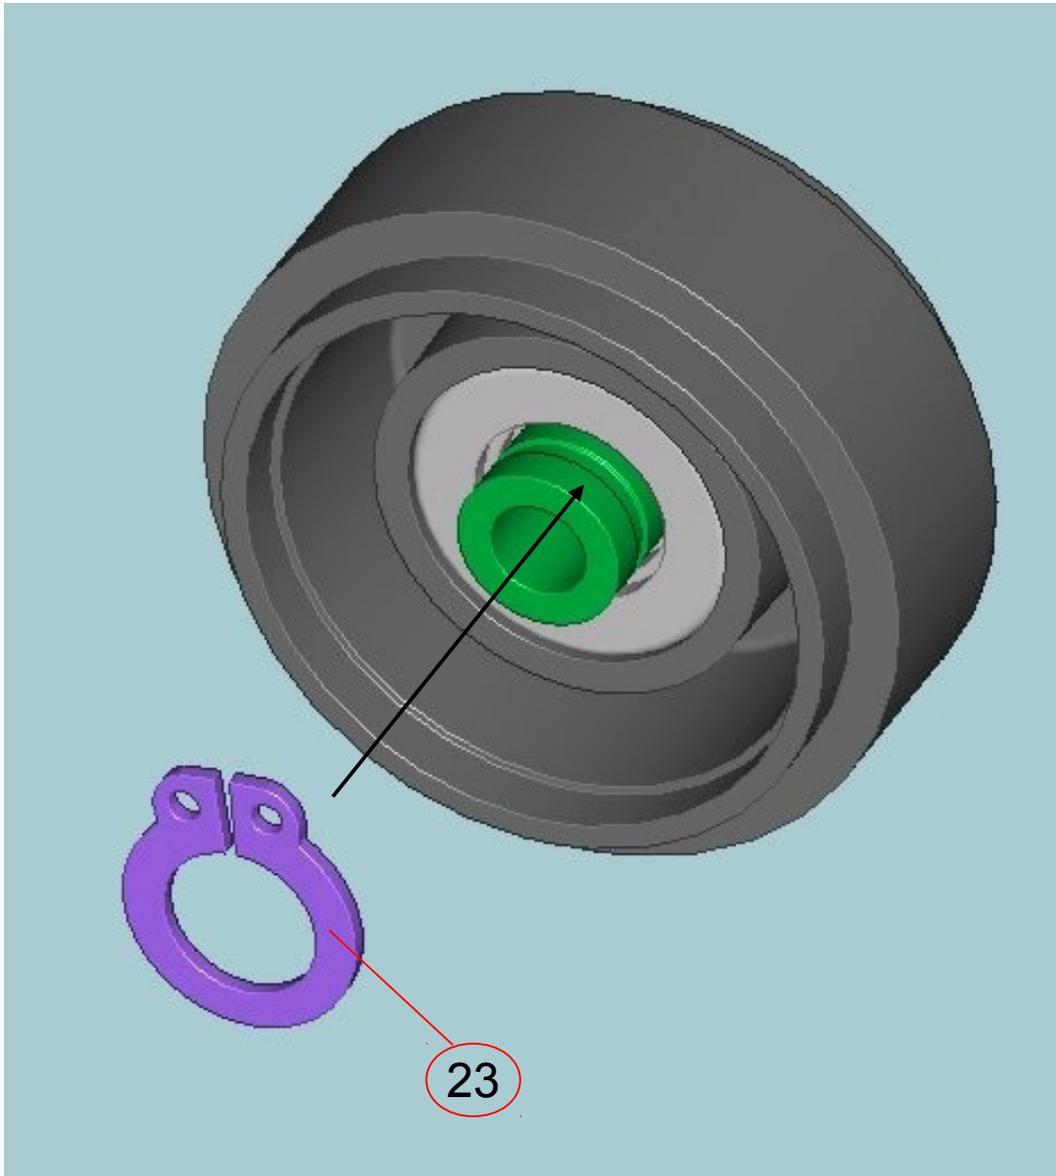

3 - Use the special seeger ring pliers to mount the seeger ring in the recessed guide, to assemble bearing and aluminium hub together.


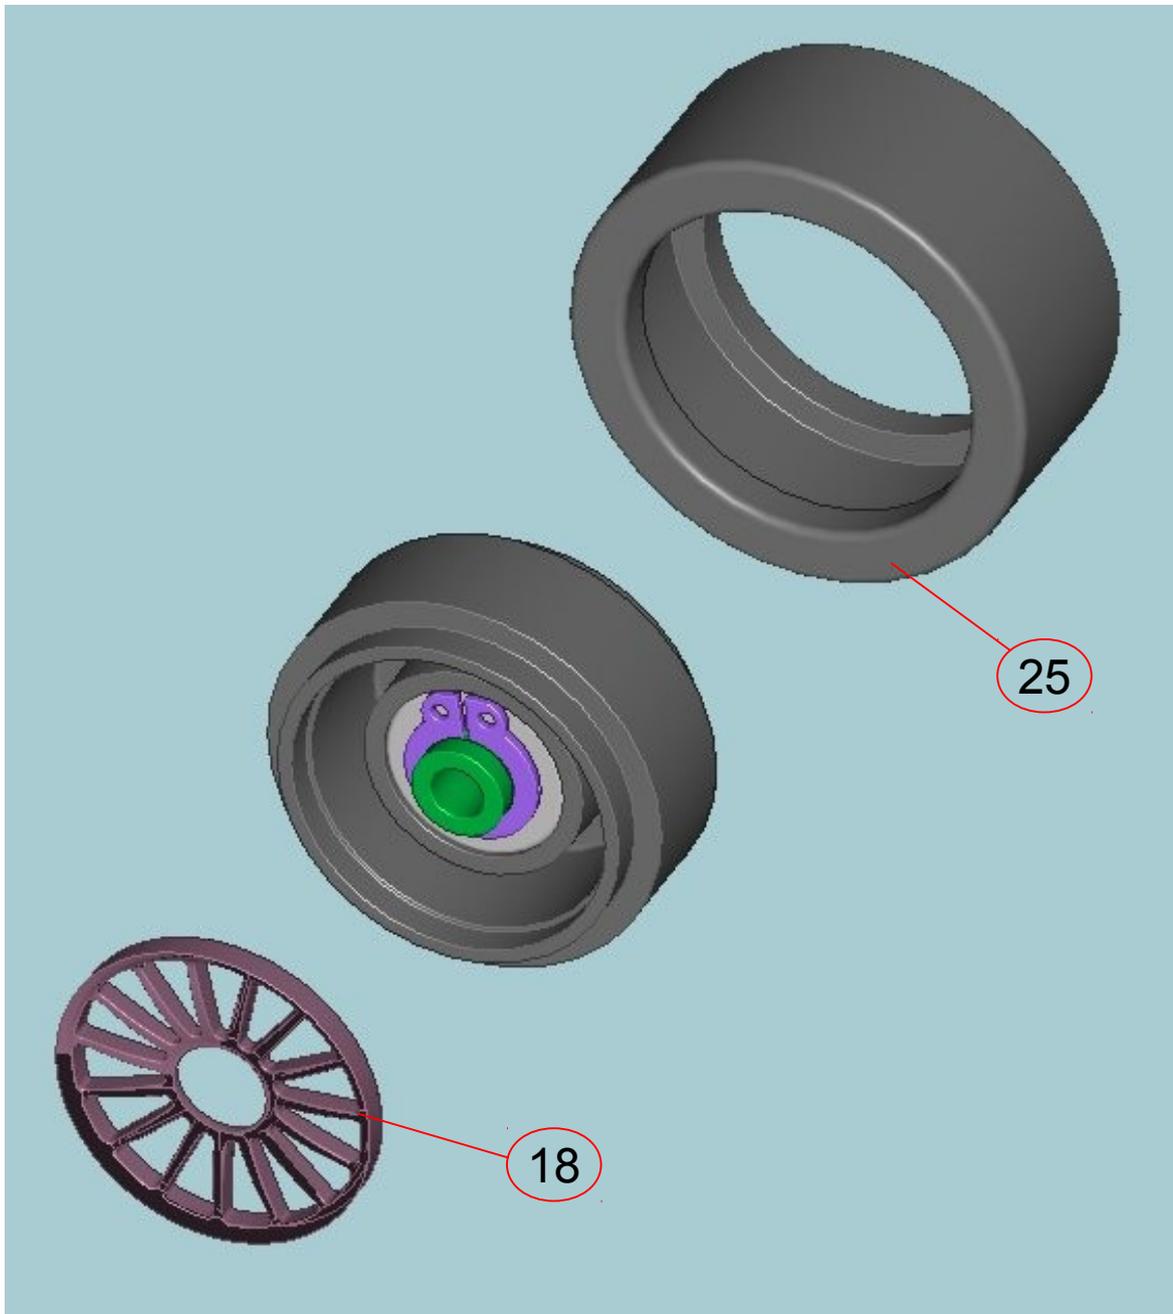


4 - Mount front wheel insert and tyre

Wheel assembly: front LEFT


FRONT **LEFT** WHEEL

5 - Insert bearing from the inside of the wheel

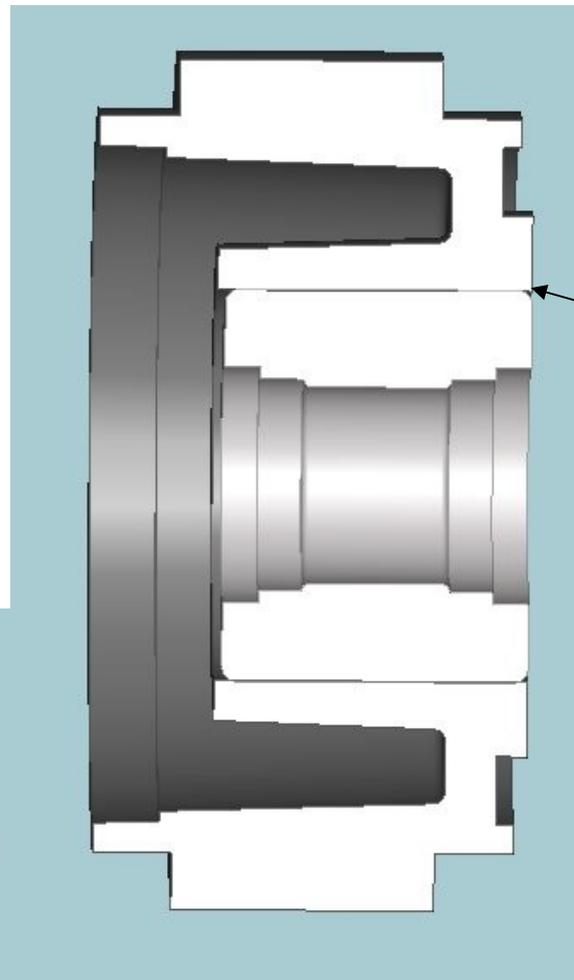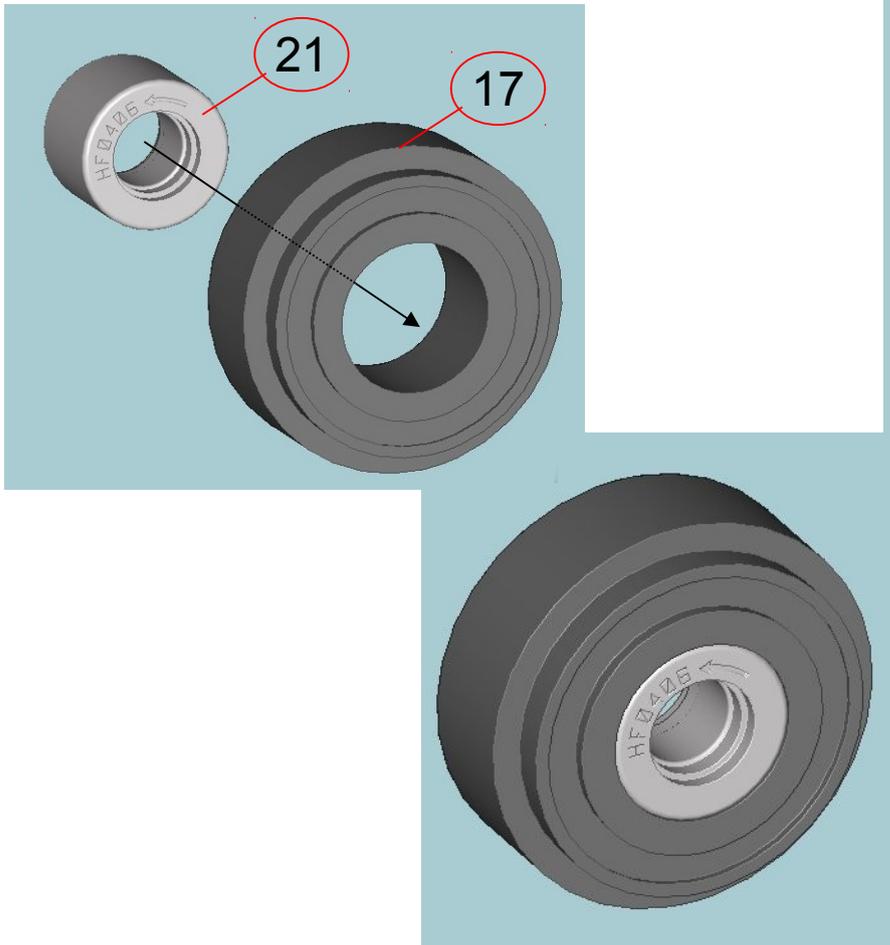



Bearing must be aligned in the plastic wheel so that its inside surface is aligned with the inside surface of the plastic wheel.


Warning! the bearing in left front wheel MUST be assembled with the 'HF0406' writing facing INSIDE the car!

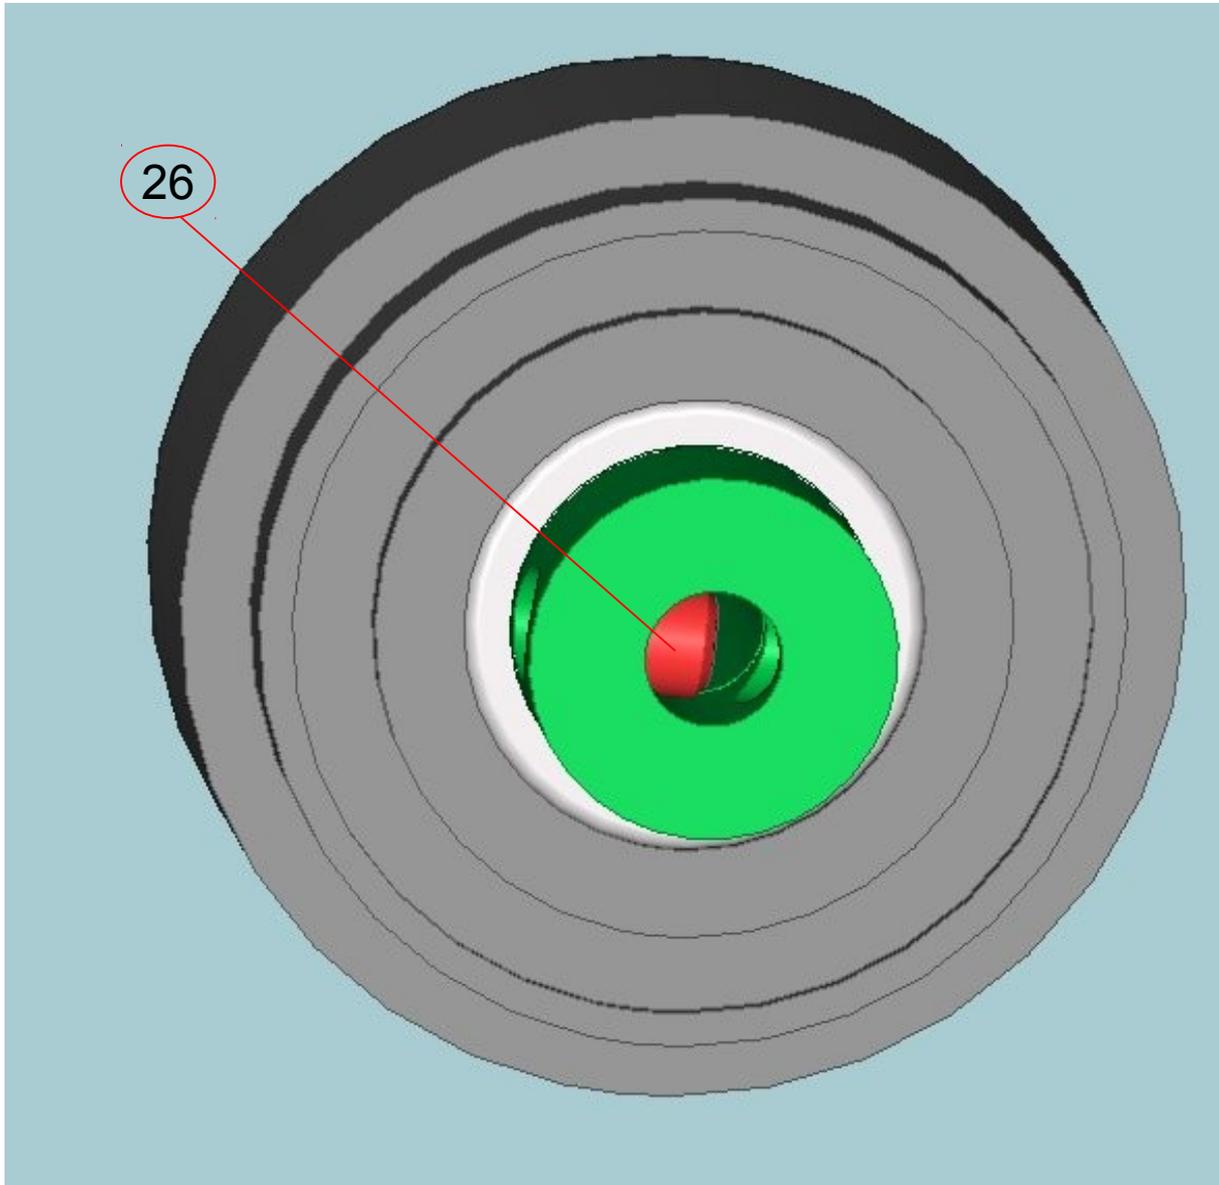

6) Insert mini screw in the front wheel hub all the way, until it's completely inside the aluminium hub


7) Press pulley with 17 teeth (2 dots on the back, see below) on the hub. The cut in the pulley must be aligned on top of the grub screw.

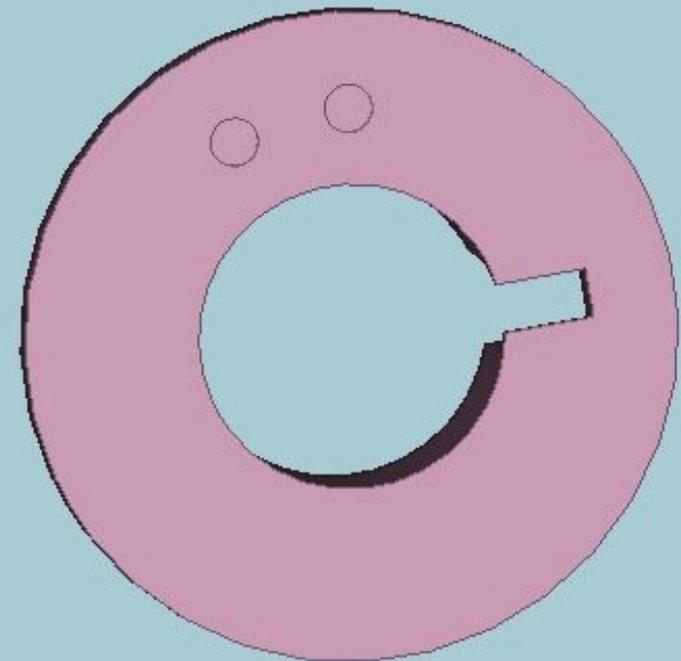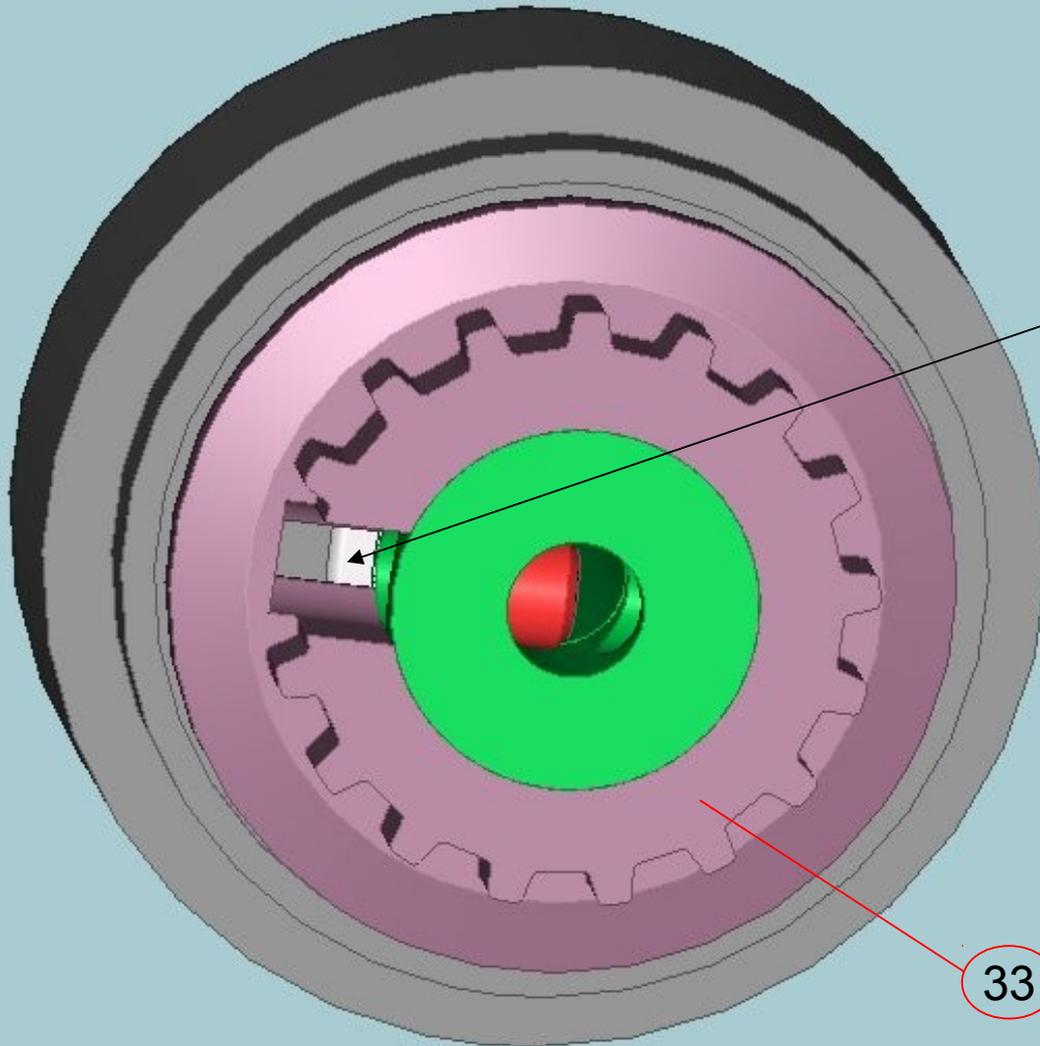

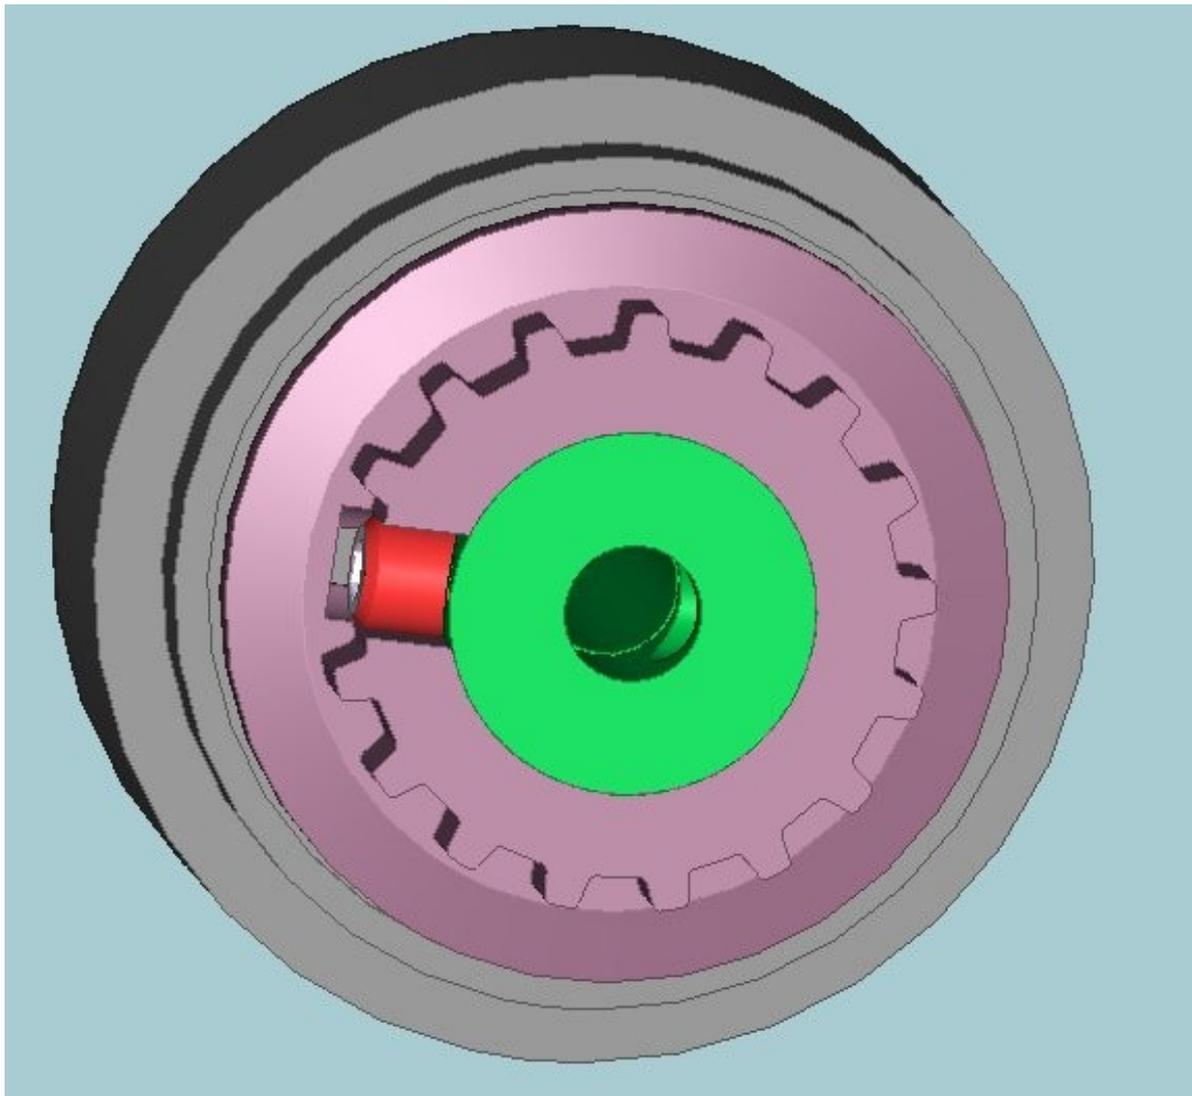


8) Unscrew the miniscrew so that the axle can be inserted in the front wheel.

Wheel assembly: rear right

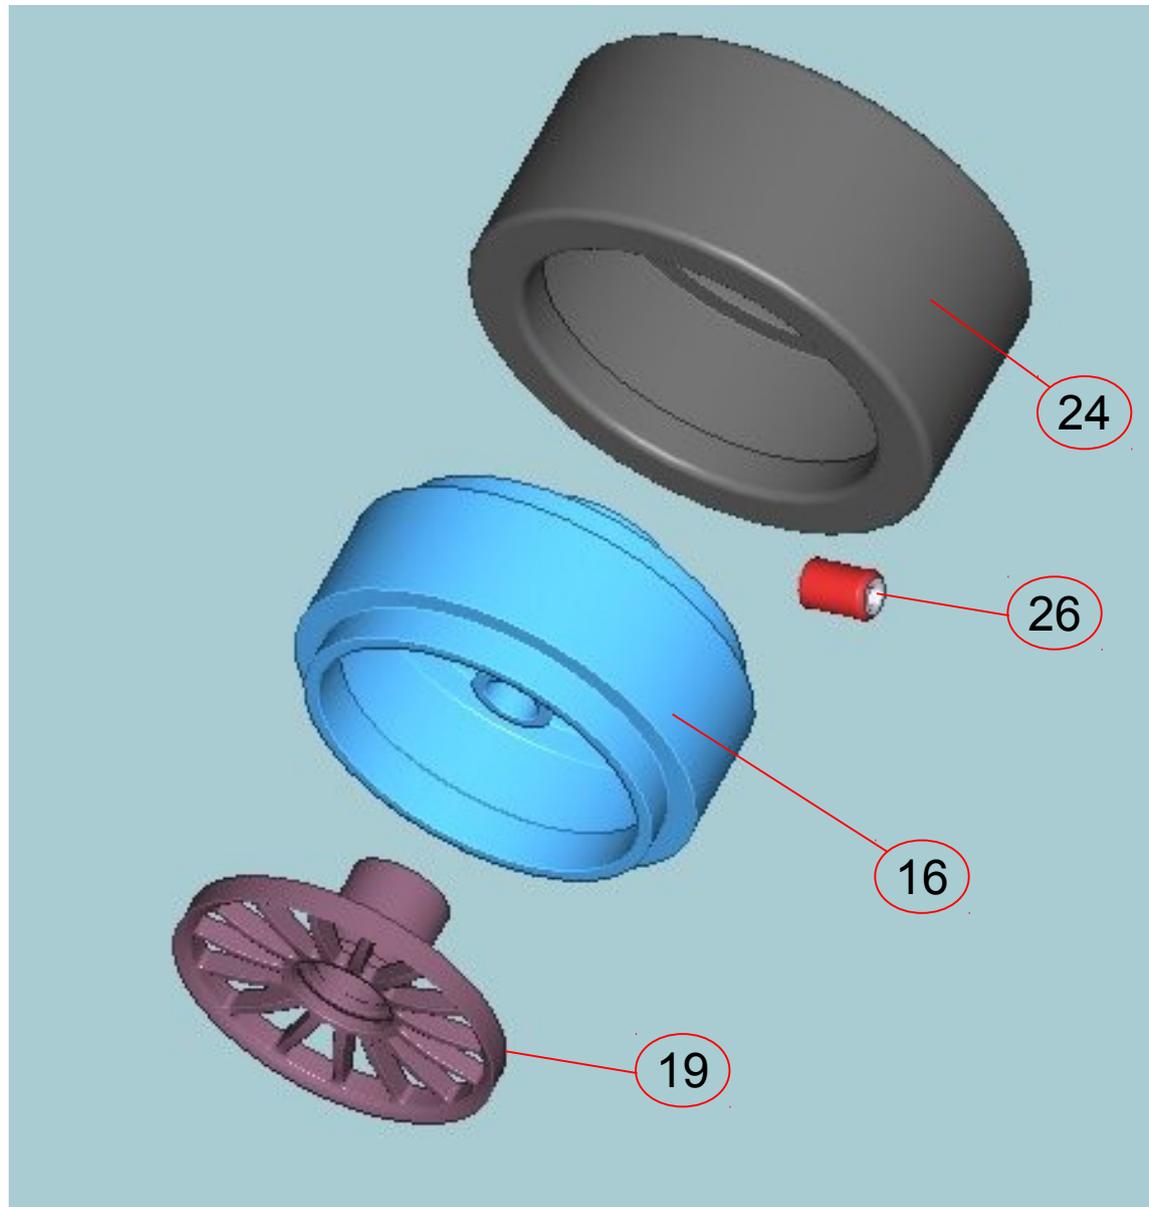



REAR **RIGHT** WHEEL
9) This is a standard wheel
- use tyres, aluminium hub,
insert, mini screw

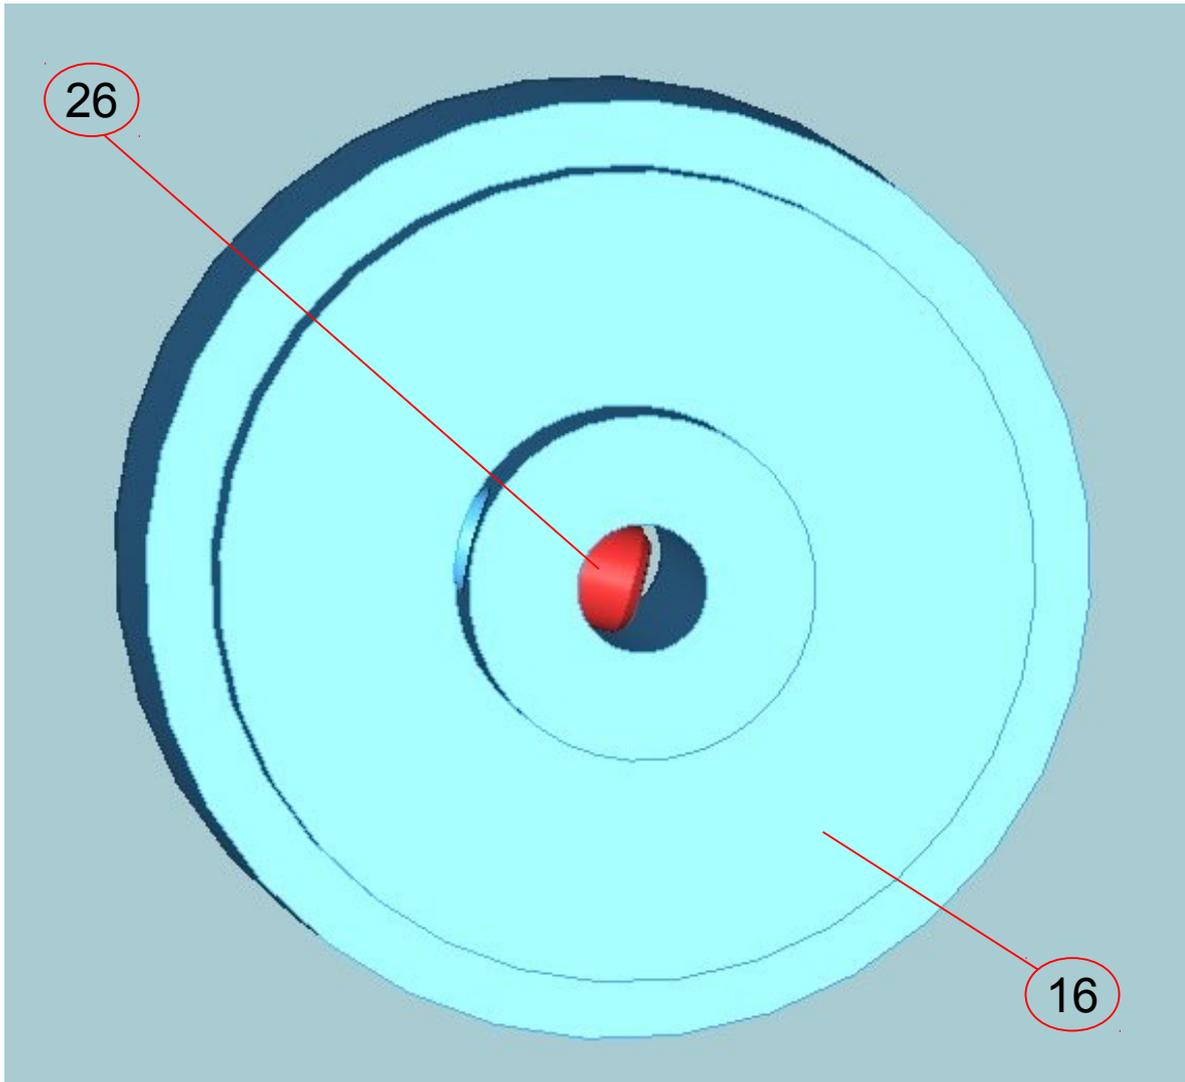


REAR **LEFT** WHEEL

10) Same technique used for the front wheels:
insert mini screw in the front wheel hub all the way, until it's completely inside the aluminium hub

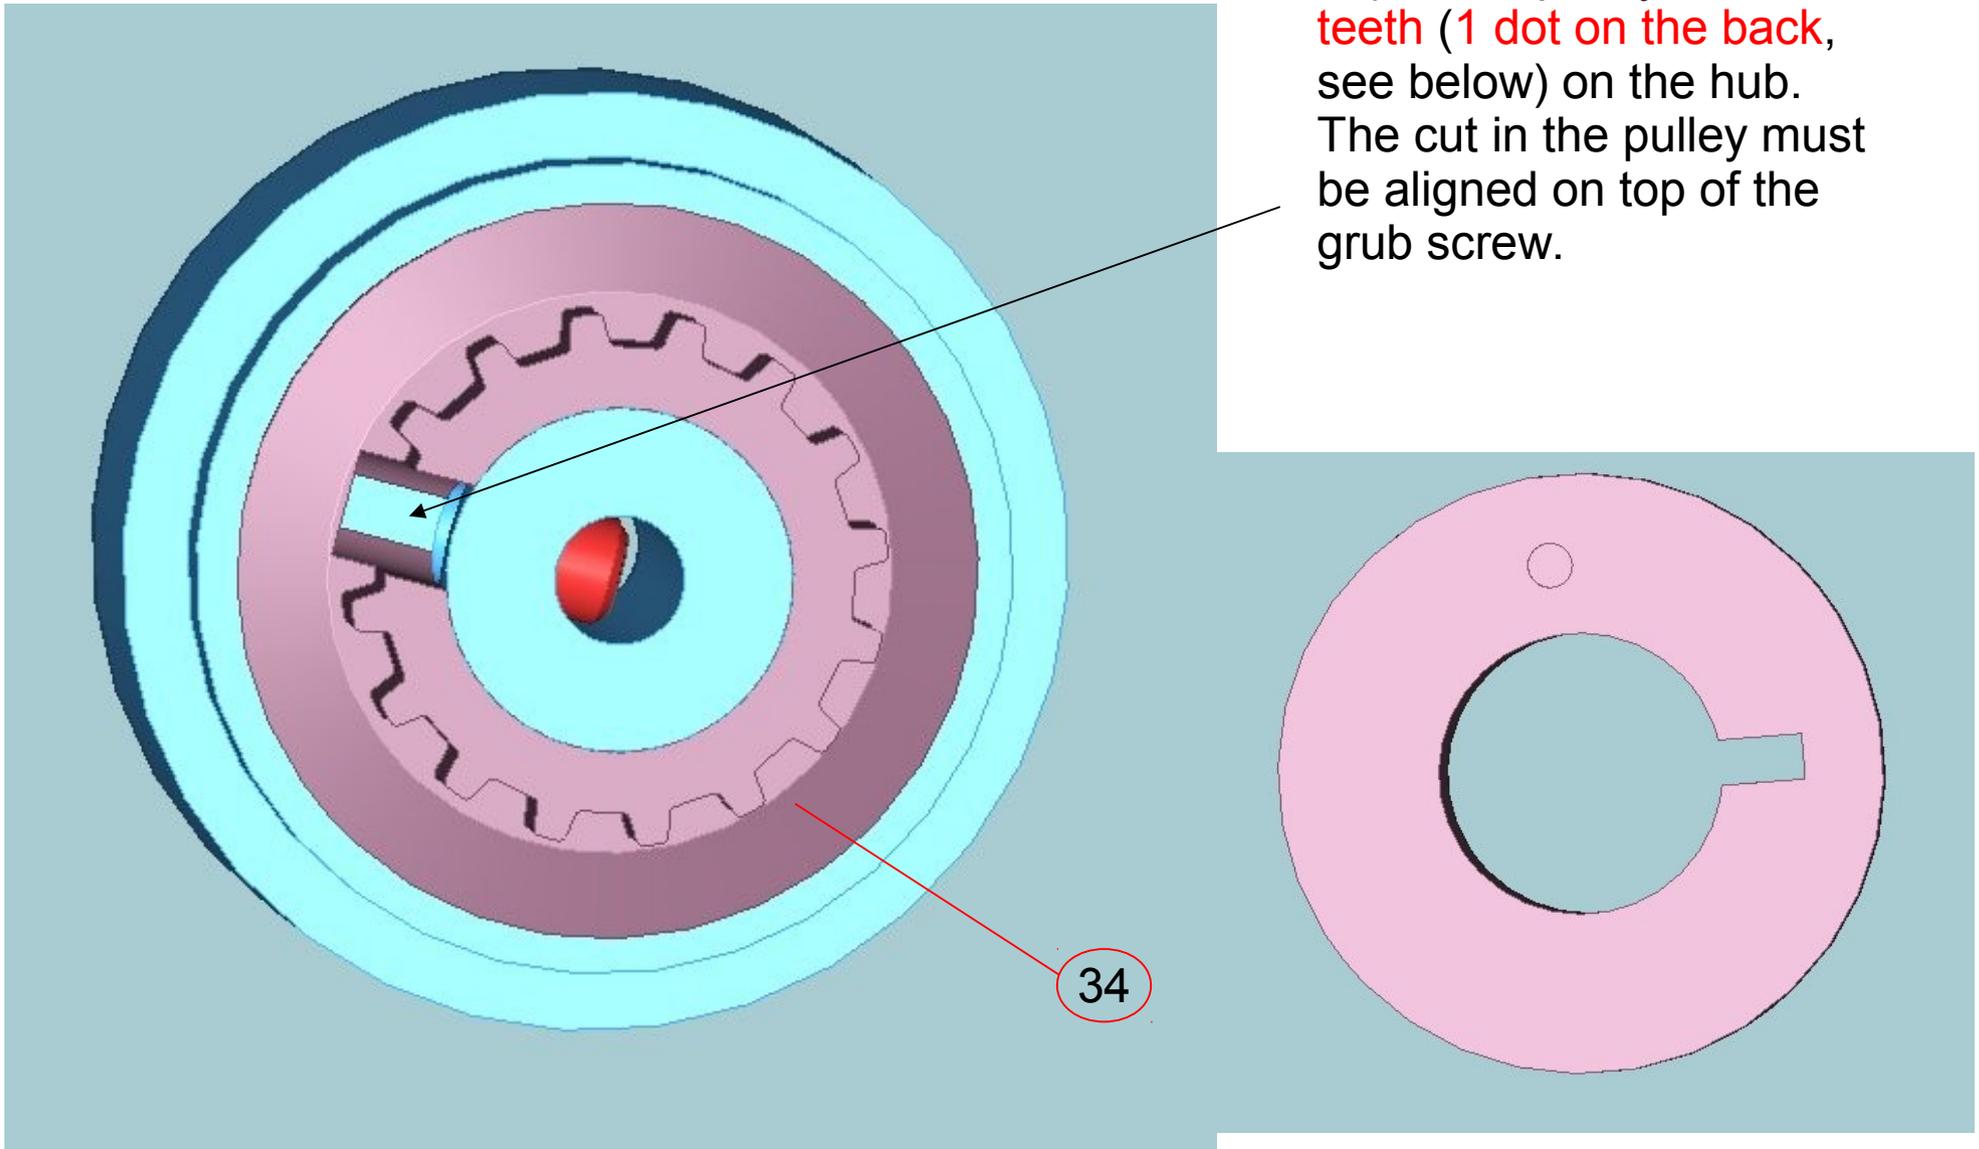

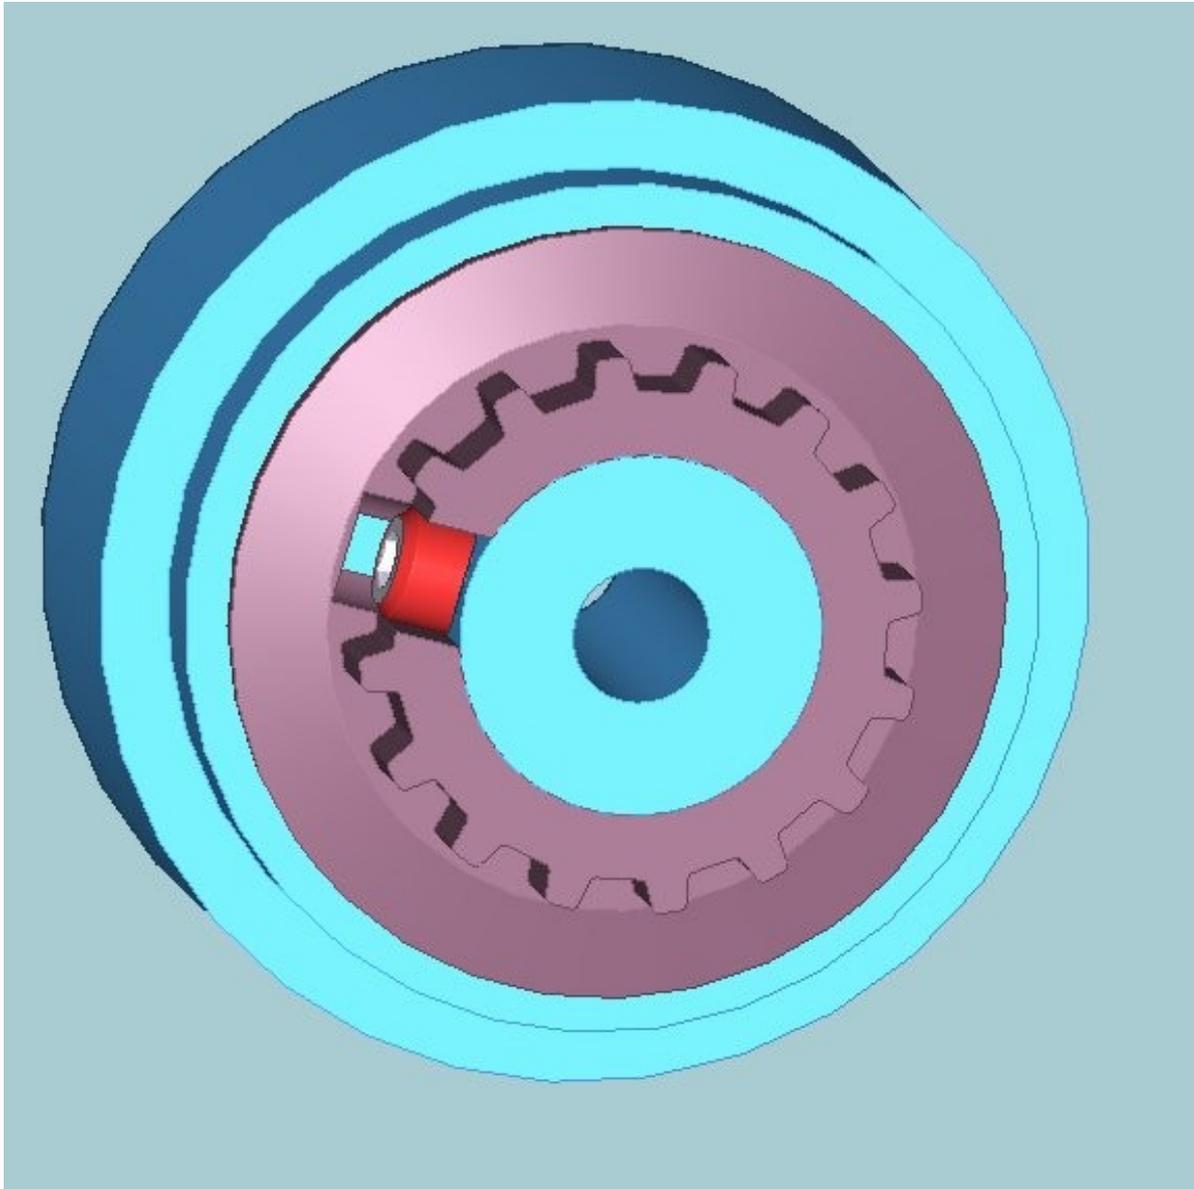


12) Unscrew the miniscrew so that the axle can be inserted in the rear wheel

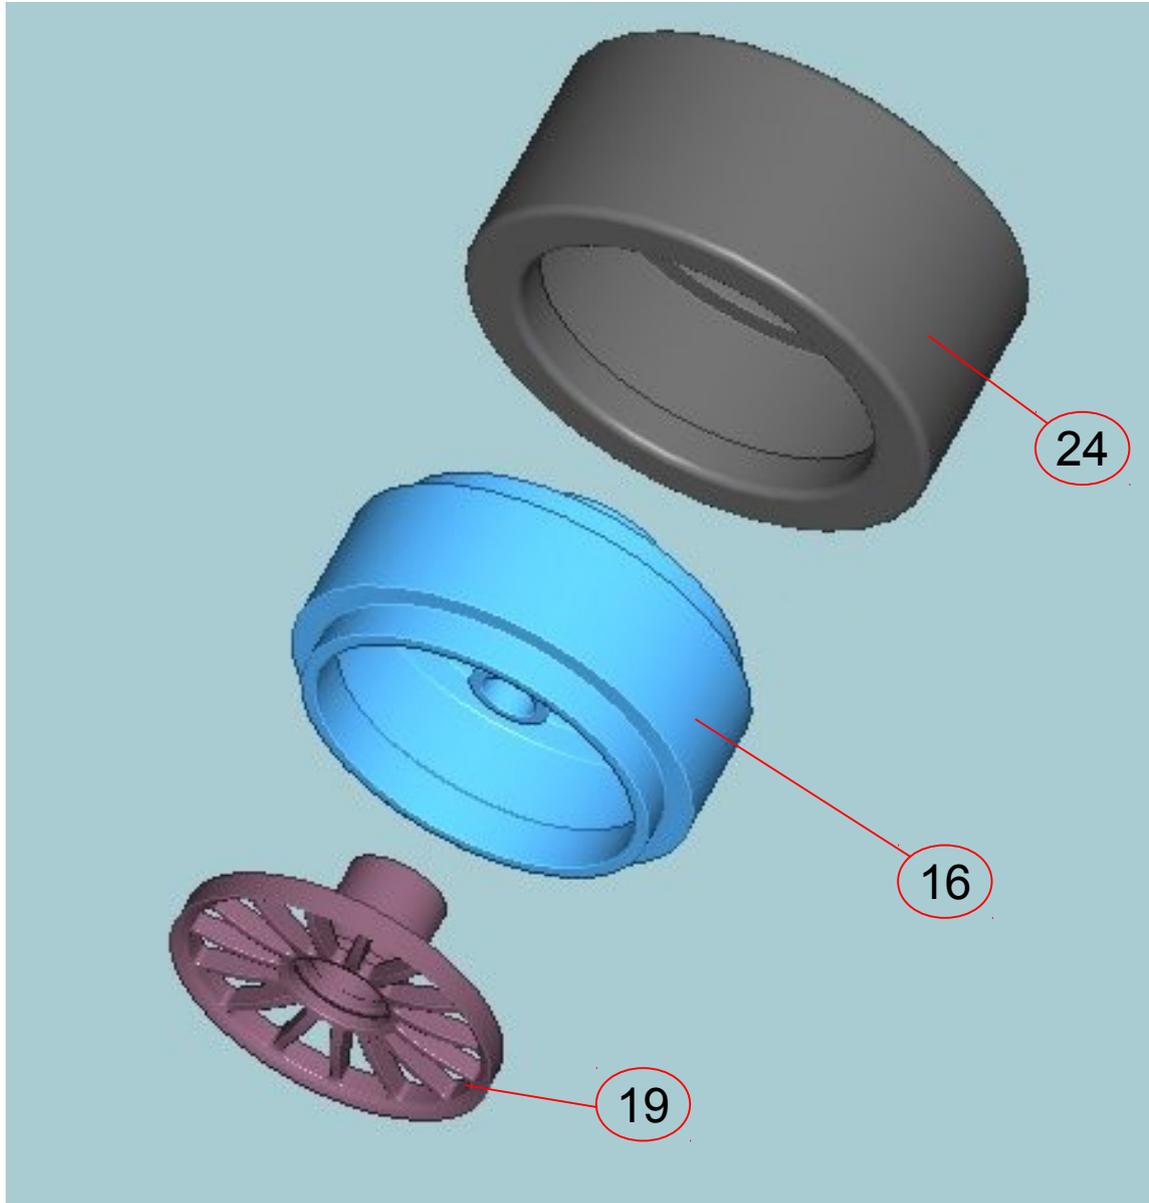


13) add tyre and wheel insert


Motor mount assembly

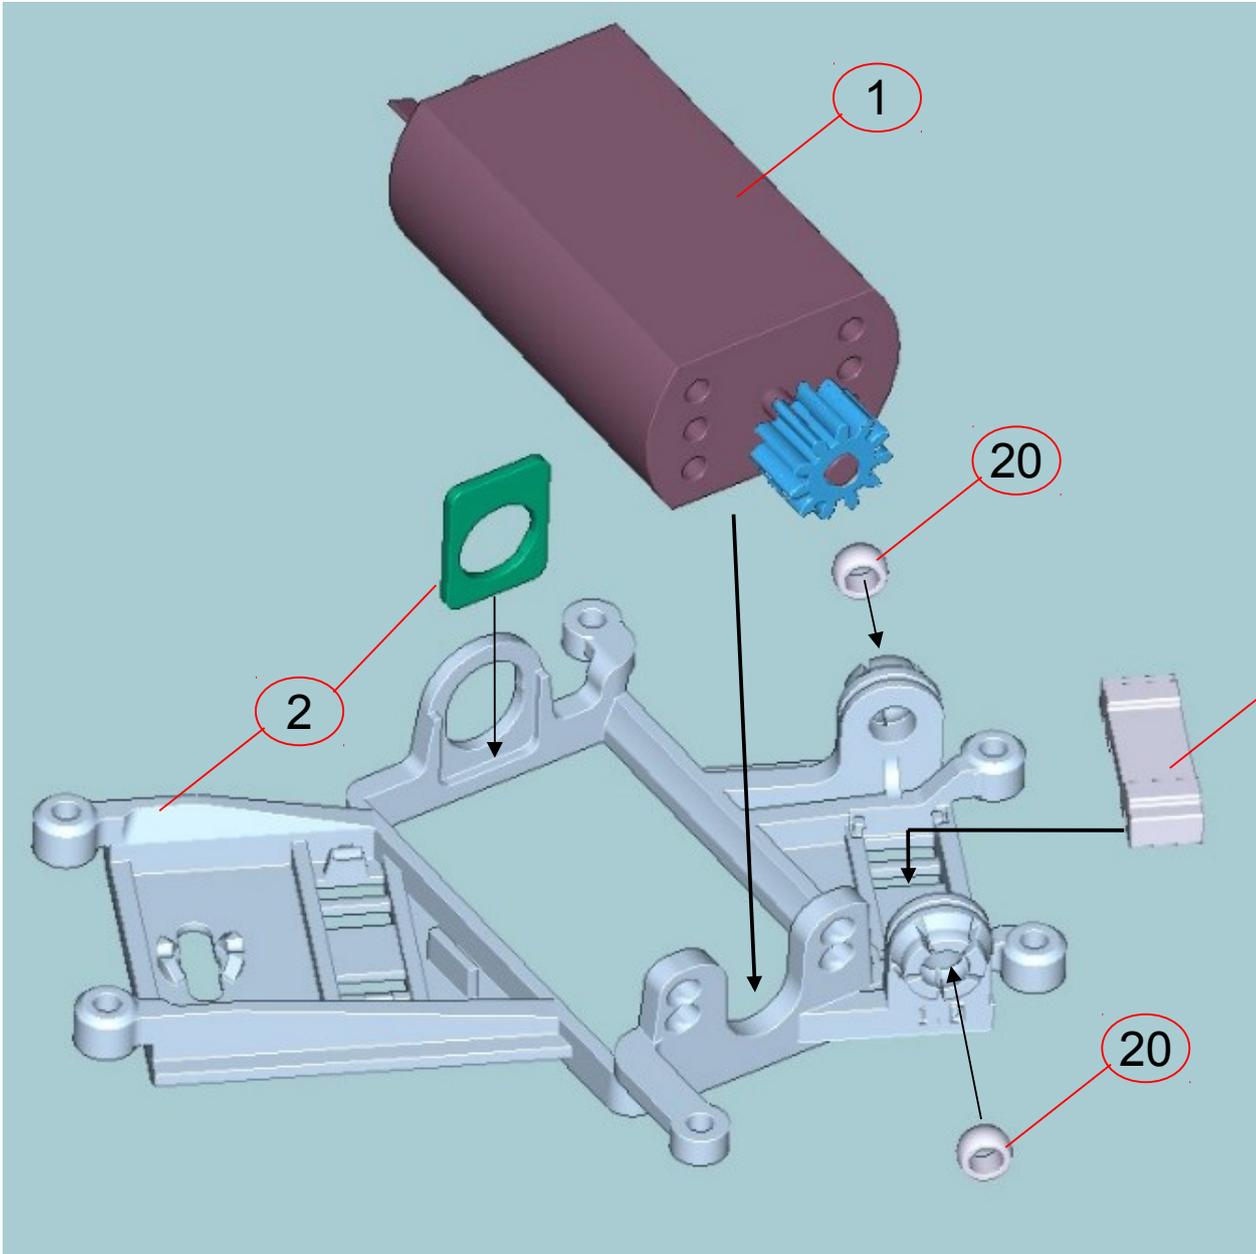


14) Add standard motor mount parts: motor, magnet, bushings, adapter

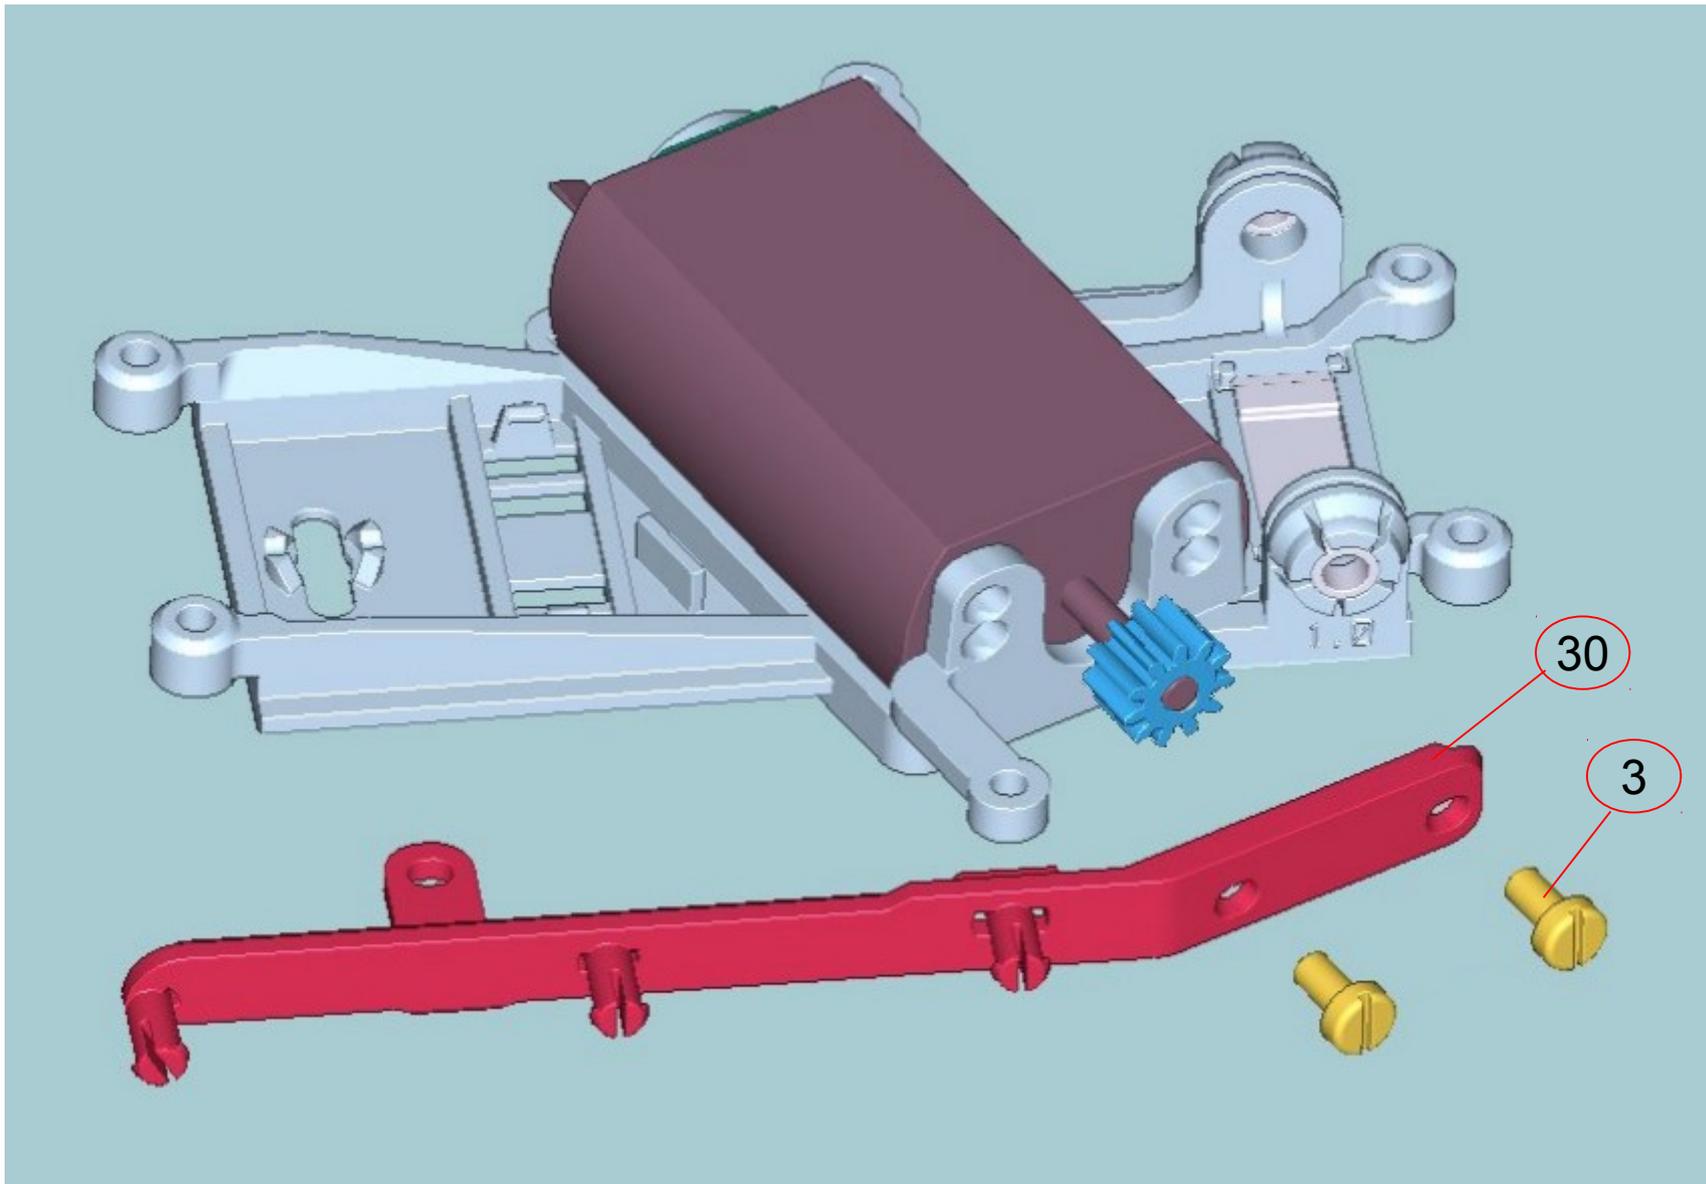


15) Screw the motor to the motor mount, keeping the pulley tensioner between the motor mount and the heads of the screws

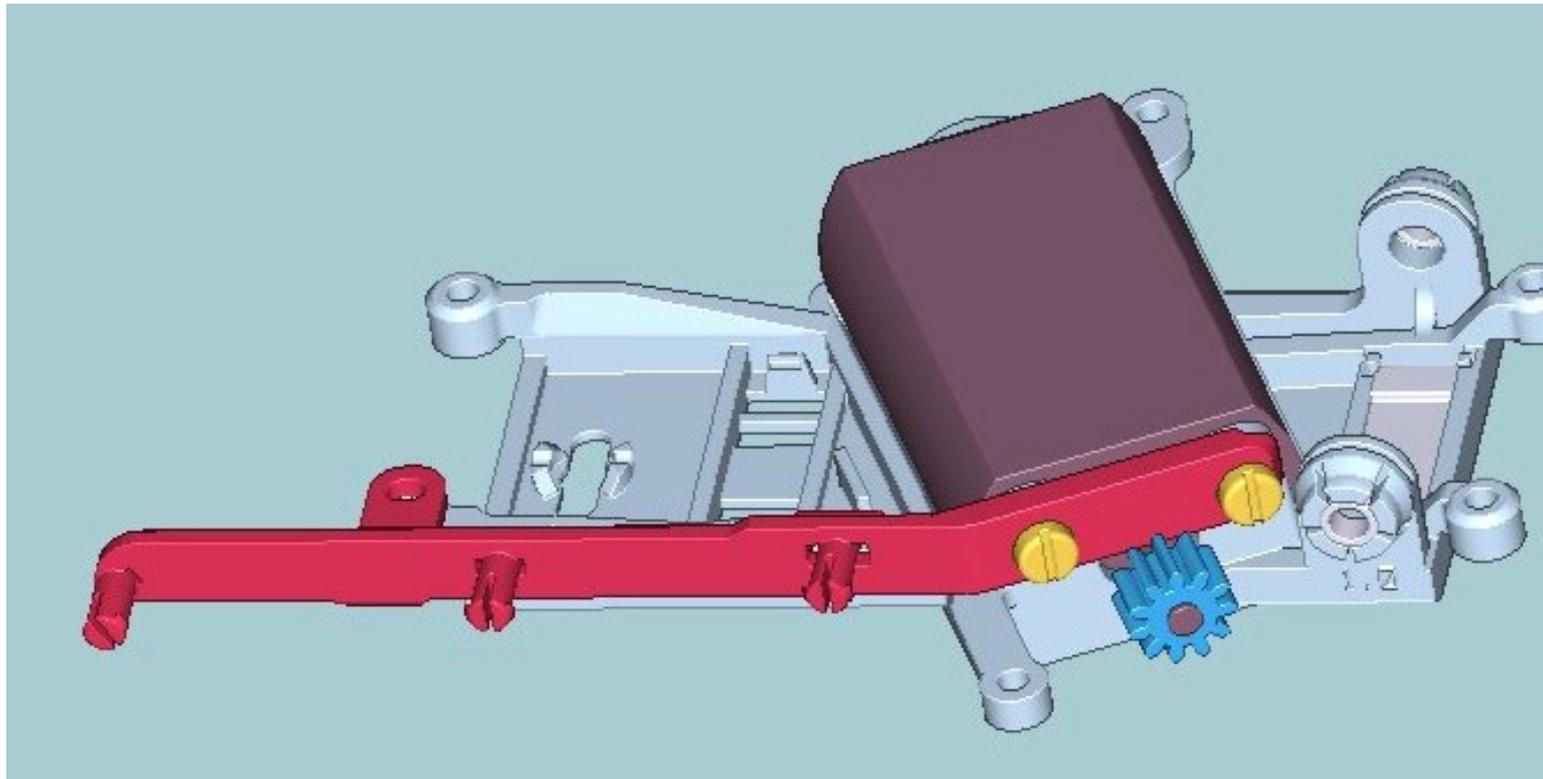


Final result

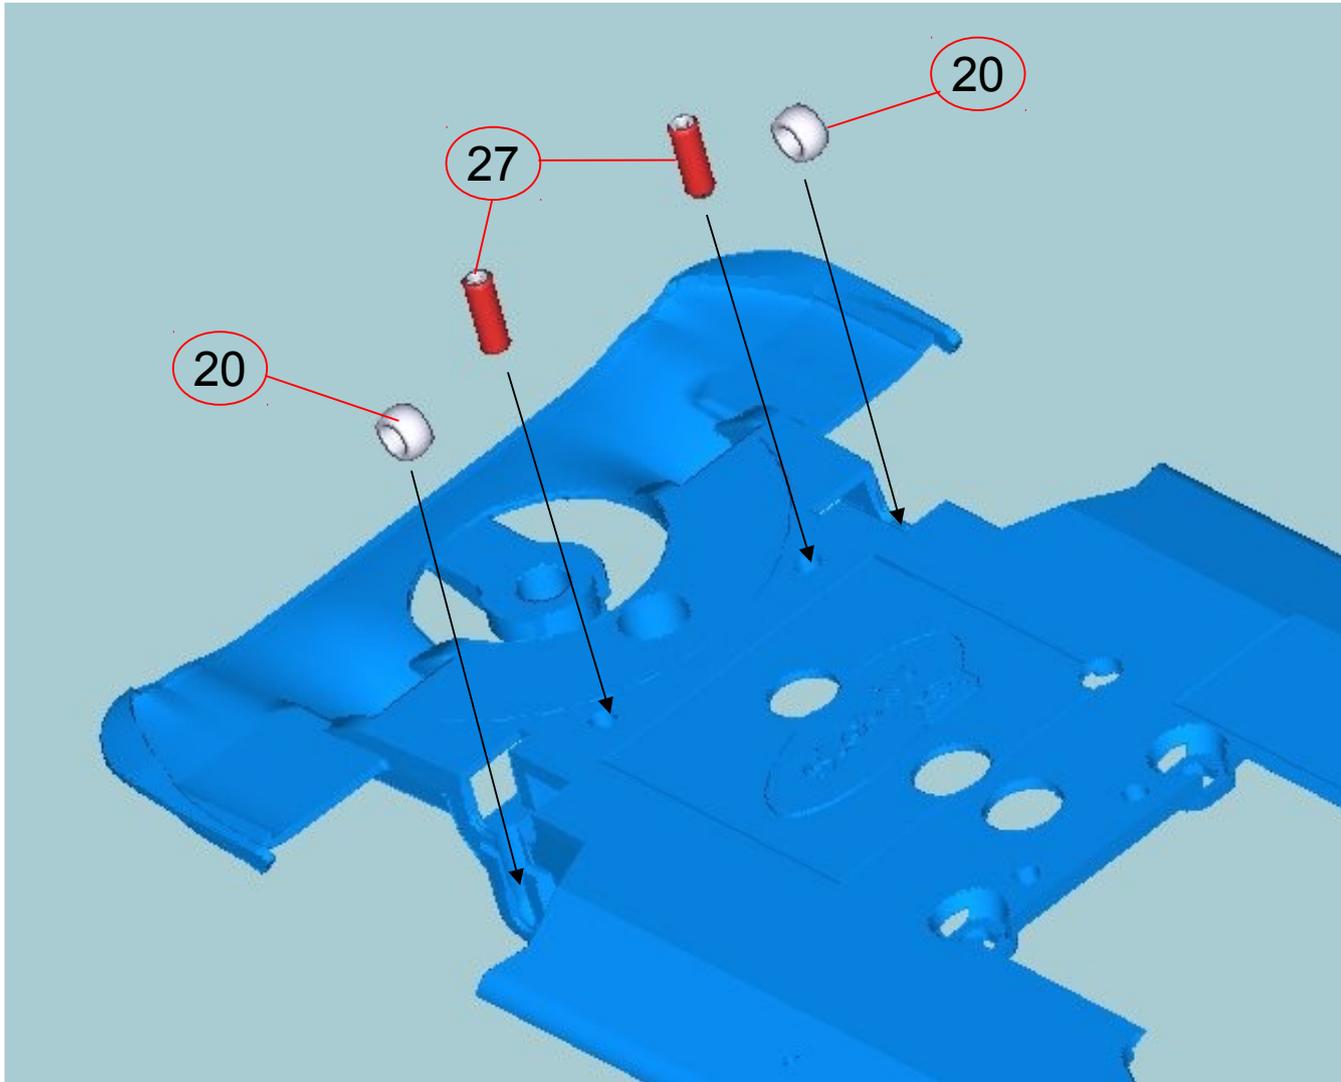


16) turn chassis upside down, and insert two 6mm mini screws in the special holes. Also add two bushings in the front axle supports.

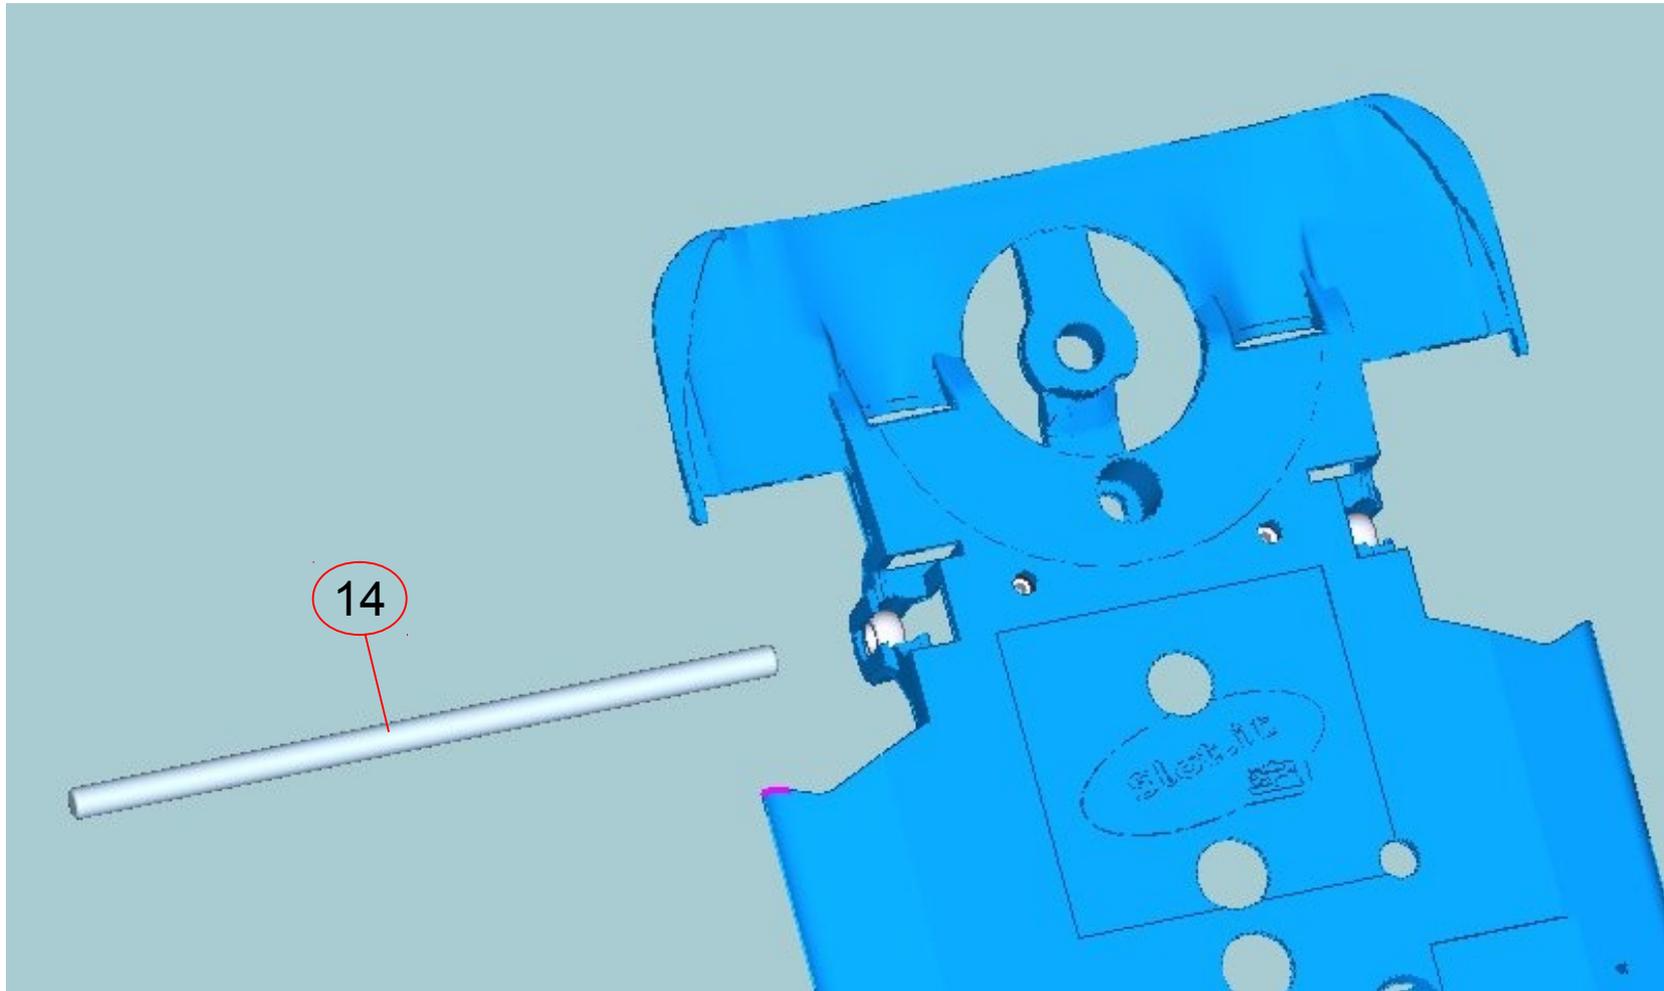


17) Add front shaft.

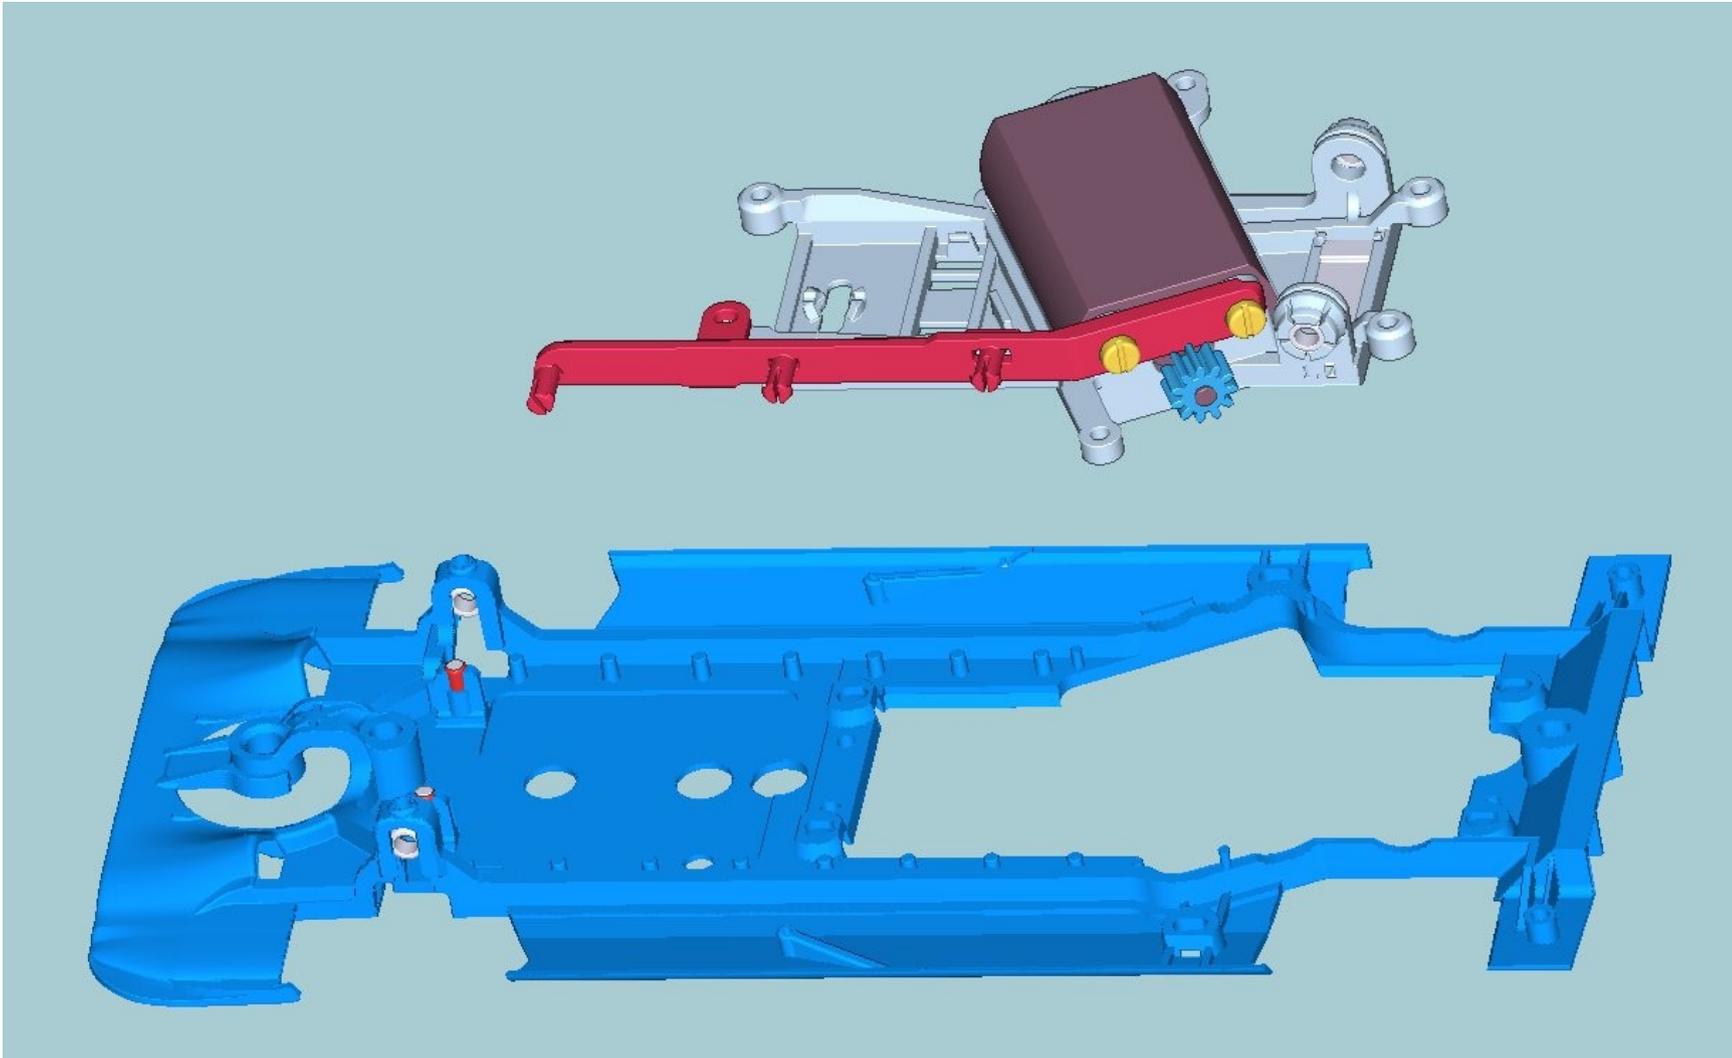


18) add motor mount assembly (use 2 body type screws at front of the motor mount, and 4 standard motor mount screws for the rest - side and rear. See image in next slide)

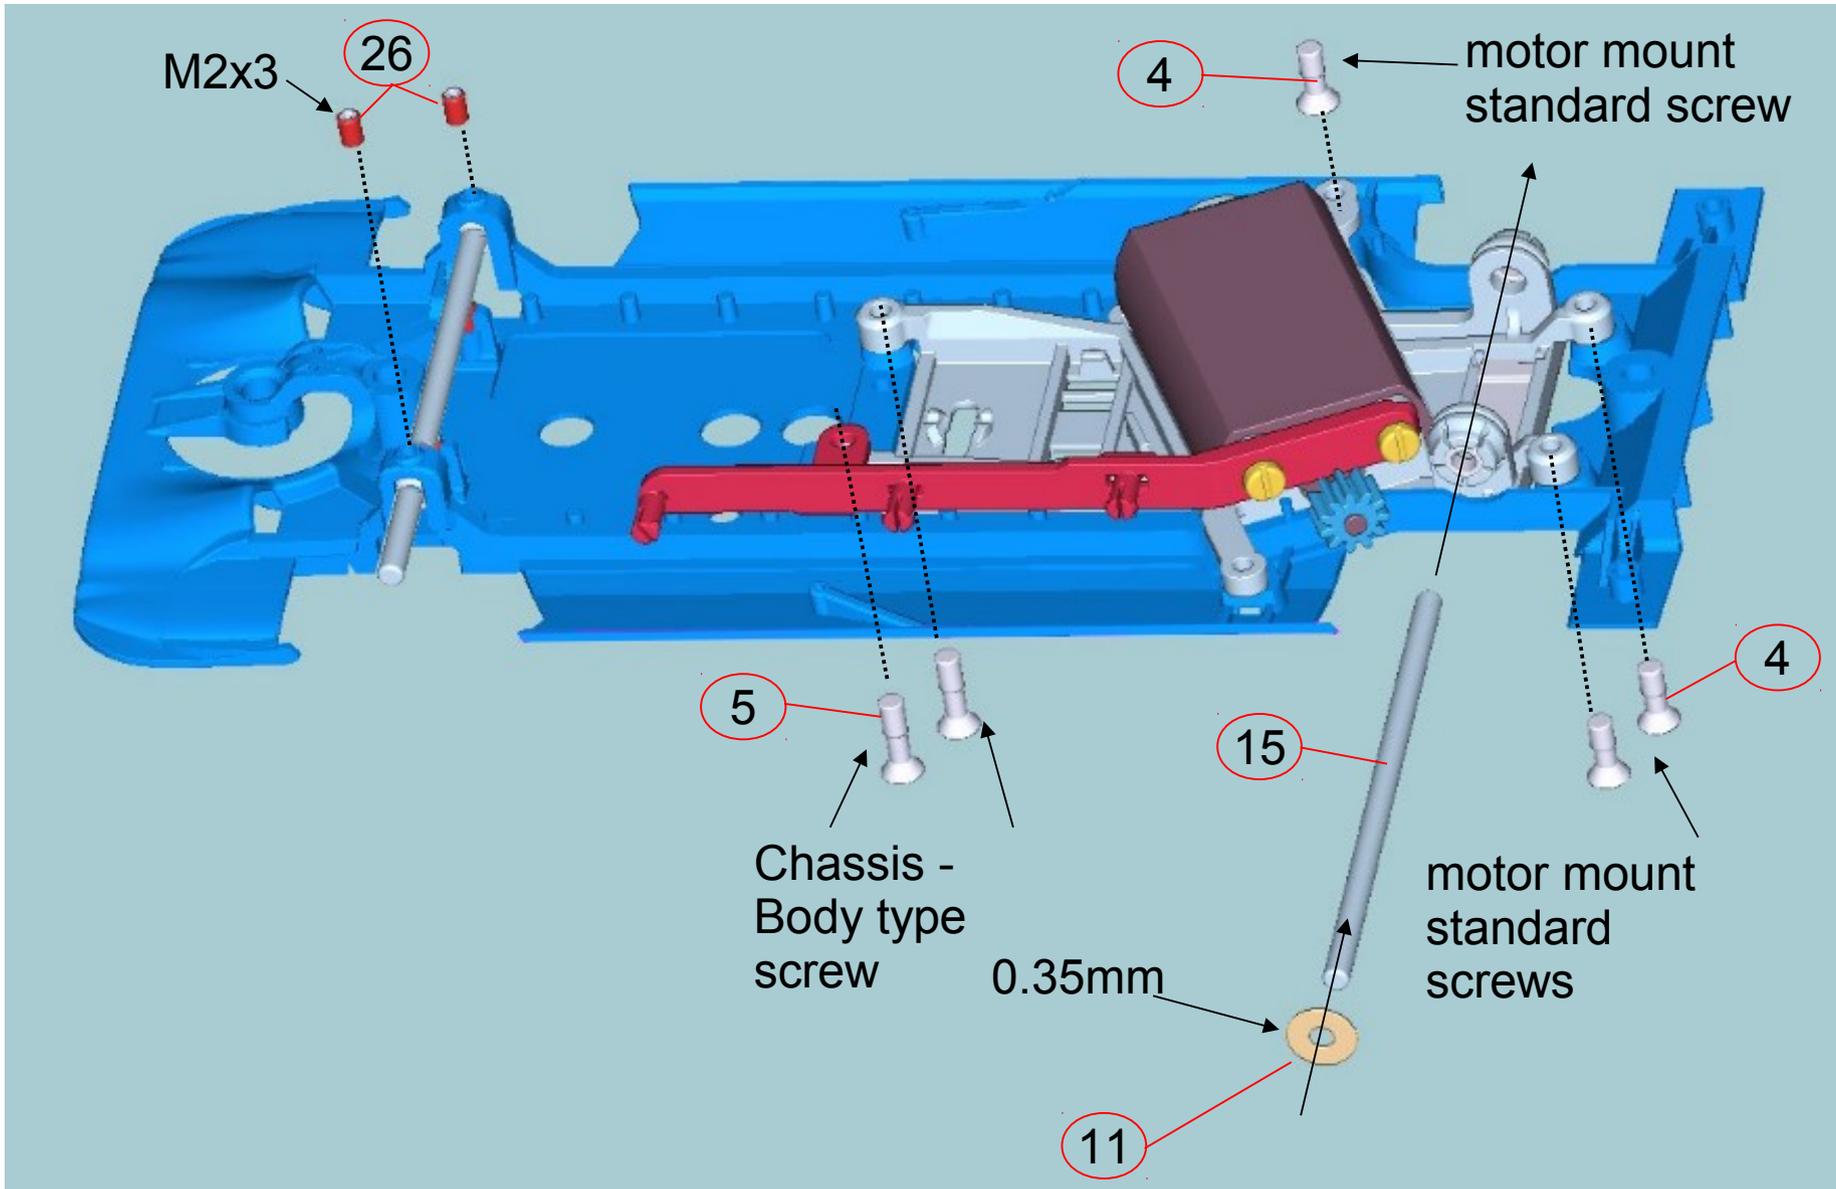


19) add 2 mini screws 3mm on the top of the front shaft, and insert 0.35mm rear spacer

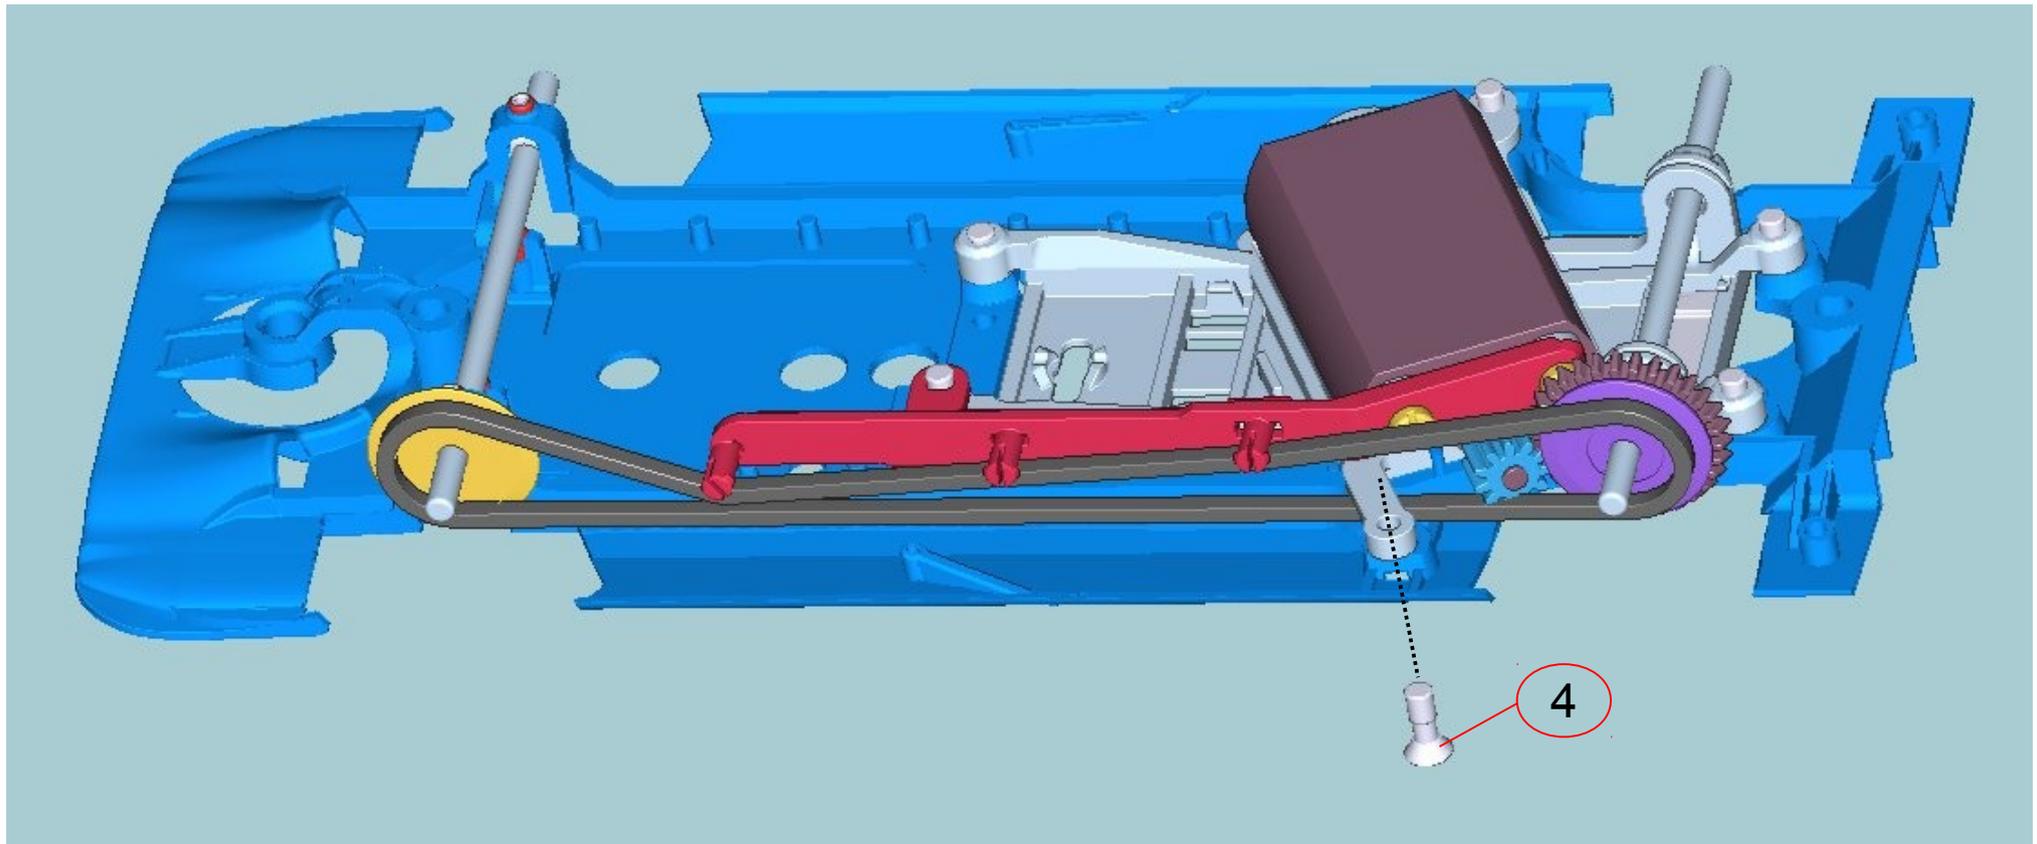

21) add last motro mount screw

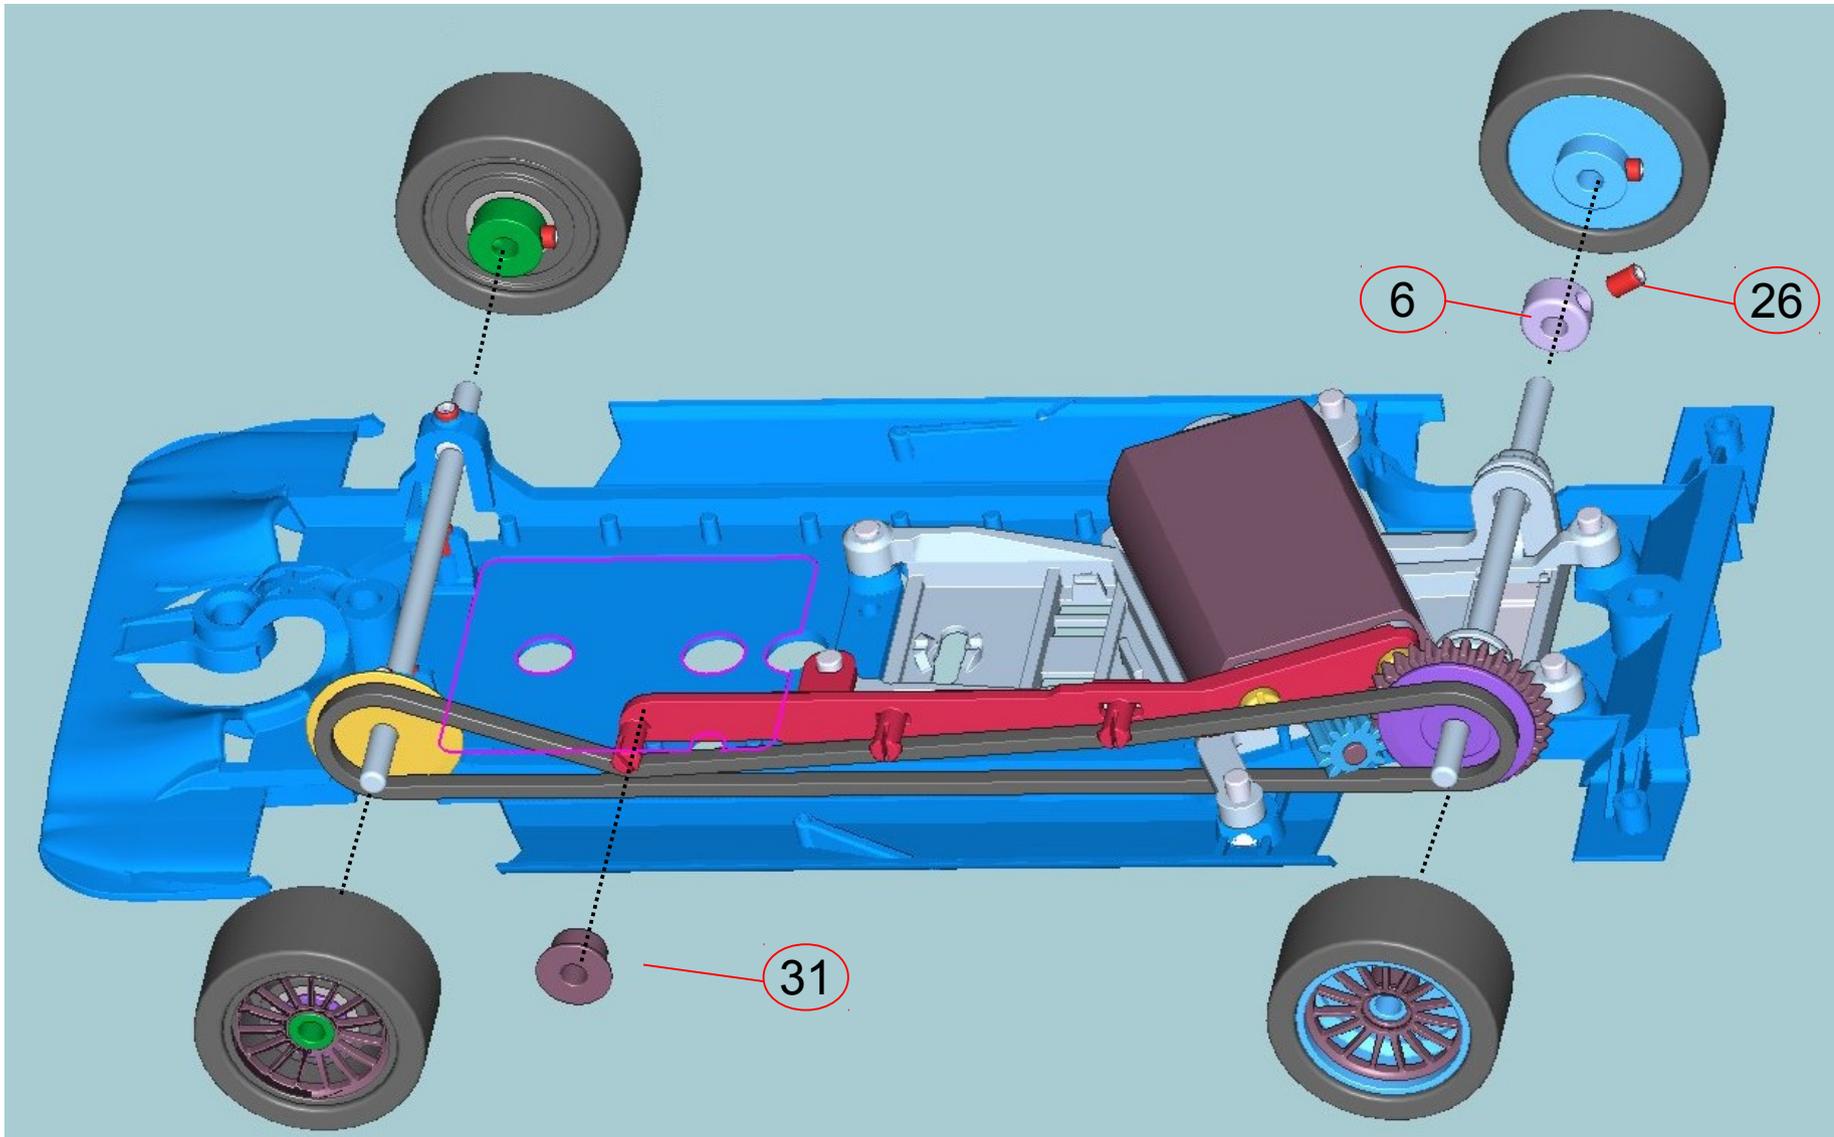

22) insert the flanged plastic bearing on the tensioner. Add the **RIGHT** wheel and the **LEFT** wheel. Add rear stopper and right wheel, with mini screws. Now assemble the left wheels, making sure the belt is in the proper place on the pulleys!!

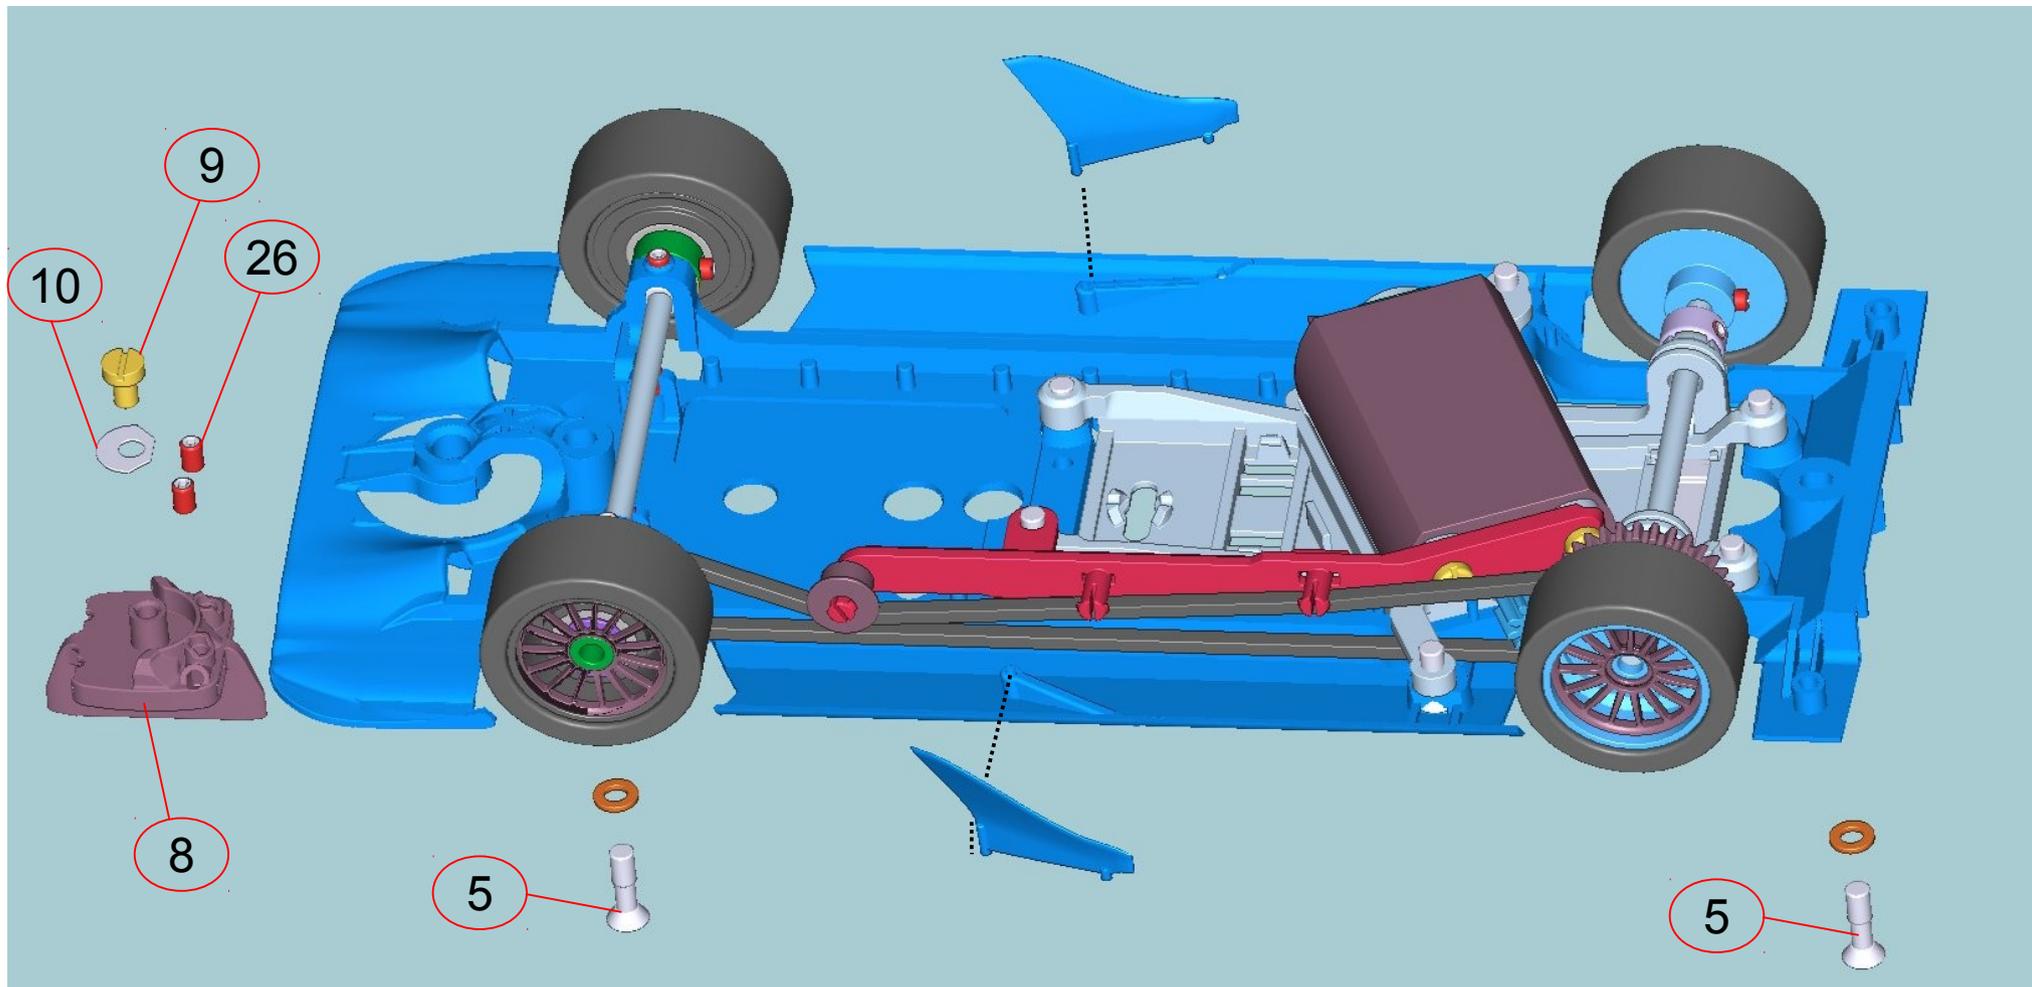

23) add pickup, side fins, and assemble to body.